



CASSETTA STAGNA IP66 PARETI LISCE – GRIGIO – CON VITI IN NYLON
IP66 ADAPTABLE BOX 376x300x120 – SMOOTH WALLS - WITH NYLON SCREW



Dettaglio accessorio staffa di fissaggio: art. 1.940.ST
Detail accerrory – fixing bracket
Art.: 1.940.ST



Dettaglio apertura coperchio a cerniera
Detail opening hinget lid



Set fissaggio per cassette 014.A.PL: art. 1.014.A
Fixing kit for 014.A.PL: art. 1.014.A
Un sistema esclusivo che permette di fissare la cassetta alla parete senza forare il fondo, mantenendo il grado di protezione invariato e il doppio isolamento in caso di fissaggio su supporti metallici.

An exclusive system of wedge that allows to fix the to the wall without perforating the bottom, maintaining the degree of protection unchanged and the double isolation in case of fixing on metallic supports.




CARATTERISTICHE TECNICHE

Dimensioni interne / Internal dimensions	376x300x120
Gradi di protezione / protection degree	IP66
Grado IK / IK degree	IK06
Resistenza al calore / Heat resistance	Glow wire 650°C
Potenza Dissipabile / Dispersible powers	36W
Colore / Color	Grigio / Grey RAL7035
Temperatura di installazione / Installation temperature	Max= +60°C – min.= -25°C
Materiale / Material	ABS (stabilizzato UV) - Halogen & PVC free

Normativa di riferimento / standard	EN 60670-1:2005 EN 60670-22:2006
-------------------------------------	-------------------------------------

DOCUMENTAZIONE ALLEGATA / Attached documentation

Tabella dimensionale / Dimensioal drawing	014_A_PL_TD
---	-------------

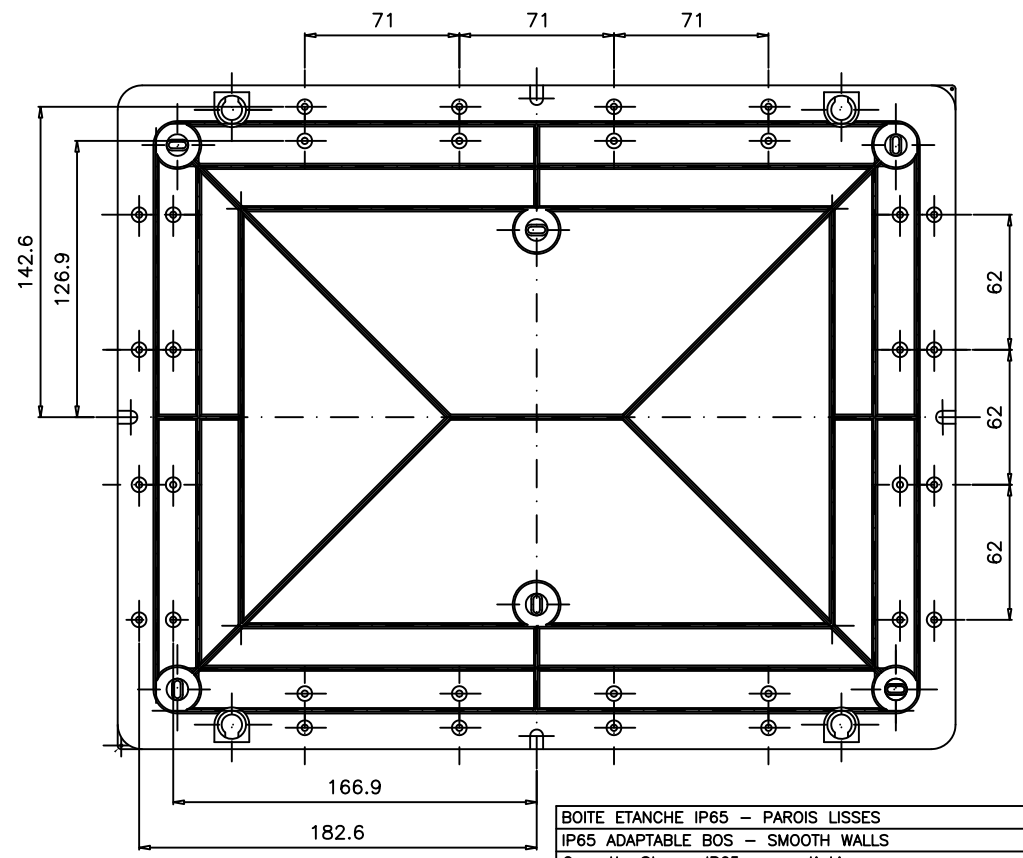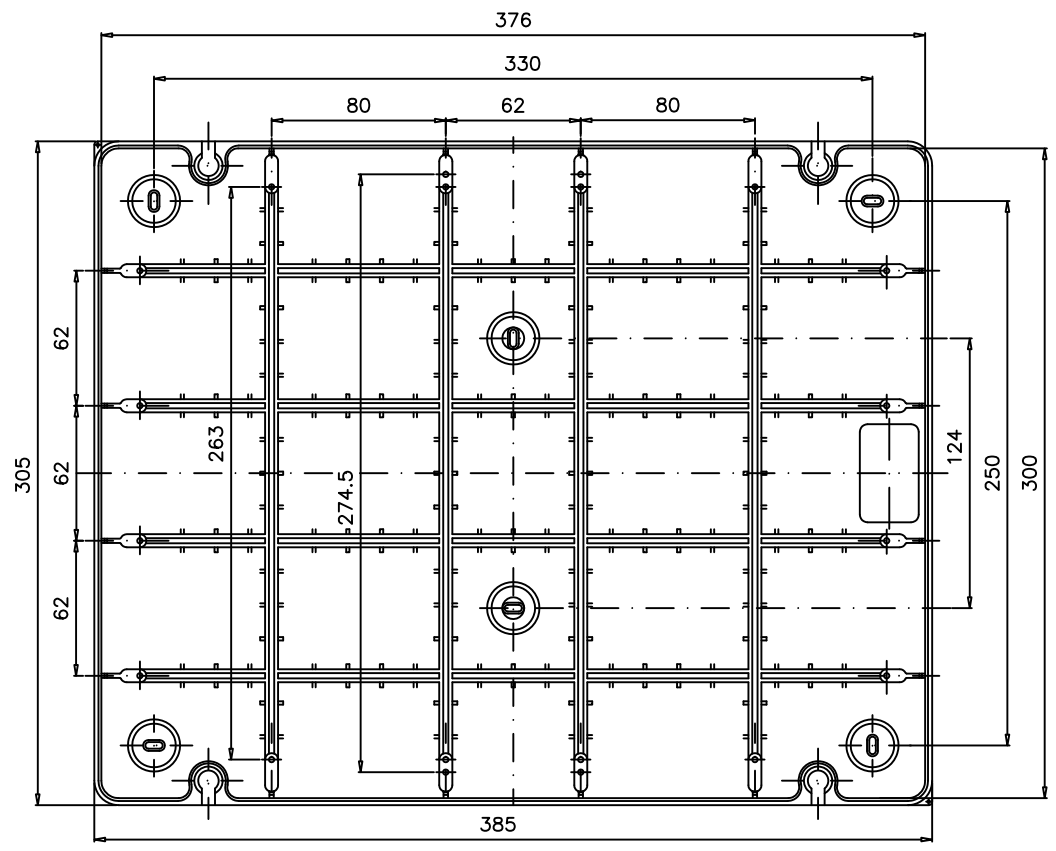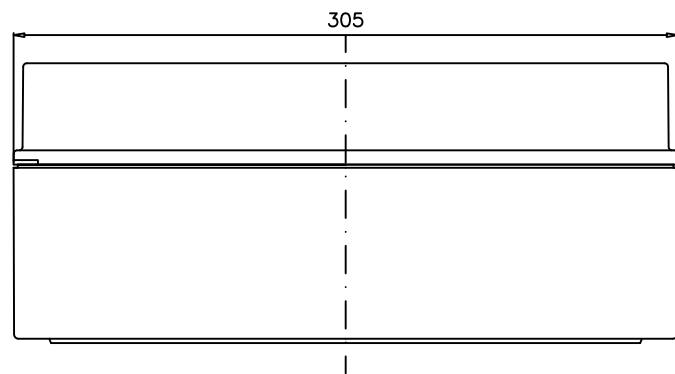

BOITE ETANCHE IP65 - PAROIS LISSES
 IP65 ADAPTABLE BOS - SMOOTH WALLS
 Cassetta Stagna IP65 - pareti Lisce

014.A.PL	014.A.PK
014.A.PL.HT	014.A.PK.HT
014.A.PL.VO	014.A.PK.VO

Marlanvil
 Tel: 02-82.46.19.11 Fax: 02-82.46.19.99
 -San Ferdinando di Puglia (BT)
 -Milano via Savotti, 17 E-mail: info@marlanvil.it

23/10/2017