



DELIA 1

LED-1L14EMP700KN62/PC22 HF 3K#

WWW.OSMONT.CZ

DELIA 1

Product code: DEL53320


Type: LED-1L14EMP700KN62/PC22 HF 3K#

Short description of the luminaire: White colour | ceiling or wall LED light with HF sensor | multipower driver | opal polycarbonate shade (PC)|



Technical

Types of luminaires	Sensor
Mounting type	surface mounted
Base material	steel
Shade material	opal polycarbonate
Base color	white Ral9003
Shade color	white
Holding the shade	folding system
Mounting location	ceiling/wall
Width	300 mm
Length	300 mm
Height	75 mm
Diameter	ø 300 mm
mounting holes (diameter)	3xø5mm
Cable entrance	2xø16mm
Energy Class	D
Impact strength	IK10
Operating temperature	from -20°C to +30°C

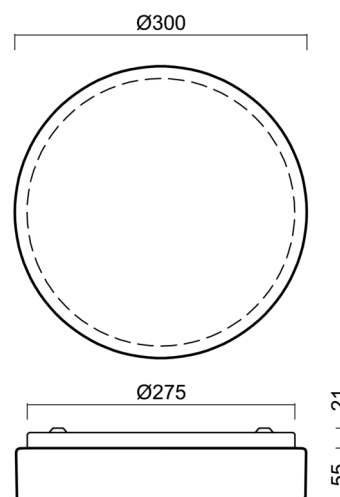


Electric

Power consumption	18 W
Ingress Protection	IP54
Socket	LED modul
Sensor	HF
terminal block	snap terminal block
Automatic circuit breaker type B10A	37 pcs
Automatic circuit breaker type B16A	59 pcs
Automatic circuit breaker type C10A	37 pcs
Automatic circuit breaker type C16A	59 pcs

Luminous

Lum. flux of luminaire	1990 lm
Lum. flux of light source	2690 lm
Luminaire efficacy	110 lm/W
Temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

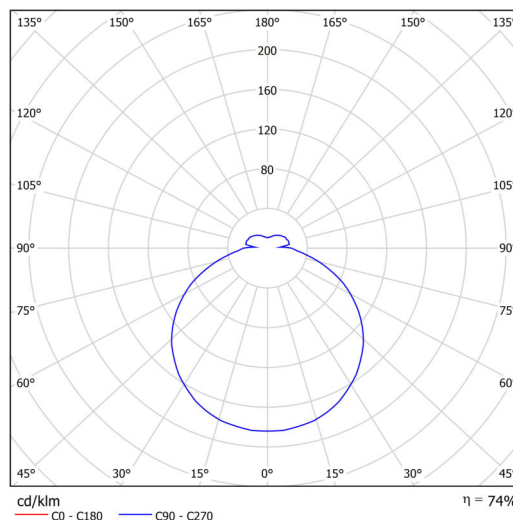


Eulum data for calculation programs are available at www.osmont.cz.

Possibility of output adjustment by the user (DIP switch on the current source).

I [mA]	700	600	500	400
[%]	100	86	71	57


EAN	8591728073114
Weight NTO	1.1 Kg
Weight BTO	1.3 Kg
Number of cartons	1 pcs
Package volume	0.01 m ³
Package 1 width	0.31 m
Package 1 length	0.31 m
Package 1 height	0.1 m
Warranty*	60 months

Installation dimensions:

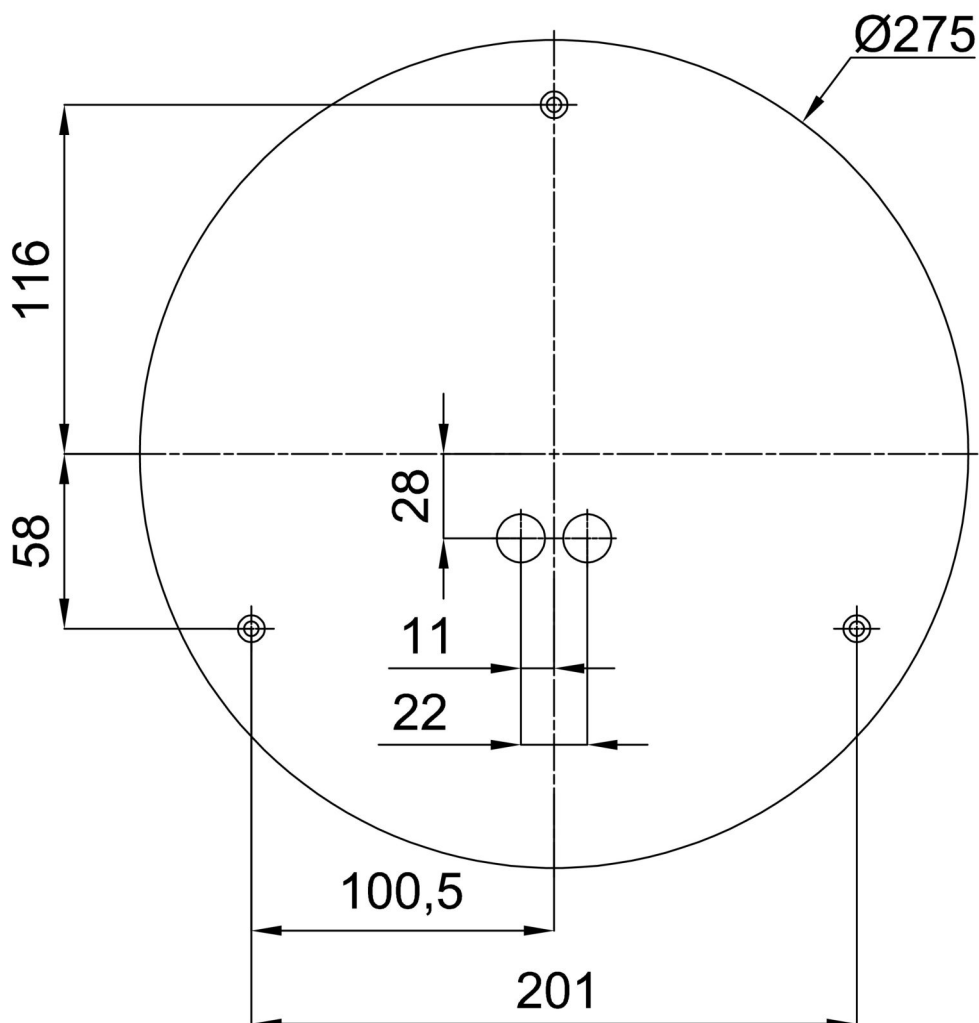

Additional assortment:

Base for surface mounting

Product code	Name	Color	Picture	Drawing
33501	KN6/BP B	white Ral9003		

Lampshade

Product code	Name	Color	Picture	Drawing
20520	PC22	white		