



Outdoor lighting

## PADLIGHT POWER




100W



150W



200W



IS781



IS783



IS786



CRI >70



20.000 hrs



15000  
Switch



Not Dimmable



Protection  
class




Insulation  
class

Codice Prodotto Item code Code Codigo Code	Alimentazione Power source Alimentation Alimentación Stromversorgung	Tecnologia della Luce Light technology Technologie de la lumière Tecnología de iluminación Beleuchtungstechnologie	Potenza (W) Watt power Puissance Potencia Leistung	Consumo elettrico (W) Consumption Consumption Verbrauch	Lumen Lumen Lumen Lumen	Tipo di luce Kelvin degrees Degrés Kelvin Temperatura de luz °K	Materiale Material Materiau Material Material	Apertura Fascio Kind of beam Type de faisceau Tipo de haz Ausstrahlungswinkel	Fattore potenza Power factor Power factor Factor de potencia Leistungsfaktor
IS781	220-240V ~ 50/60 Hz	LED SMD	100W	100W	8000 Lm	6500K COLD LIGHT	Die cast aluminium	Diffuse 120°	>0,9
IS783	220-240V ~ 50 Hz	LED SMD	150W	150W	12500 Lm		Die cast aluminium	Diffuse 120°	>0,95
IS786	220-240V ~ 50 Hz	LED sanan 2835	200W	200W	15000 Lm		Die cast aluminium	Diffuse 120°	>0,95

Descrizione / Description / Description / Descripción / Beschreibung:

Faro LED da esterno  
LED outdoor floodlight  
Phare extérieur LED  
Faro exterior de LED  
Flutlicht für Außenbereiche

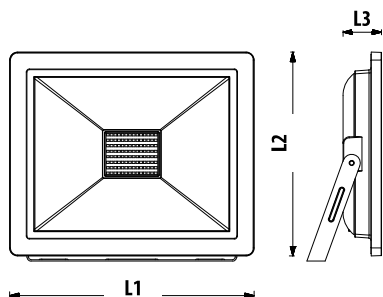

Accessori inclusi / Accessories included / Accessoires fournis / Accesorios incluidos / Mitgeliefertes Zubehör:

IS781-IS786:

Cavo 30cm VDE  
Câble 30cm VDE  
Cable30cm VDE  
Cable30cm VDE  
Kabel 30cm VDE



IS783:



Codice prodotto Item code Code Codigo Code	Lunghezza L1 Length Longueur Lungitud Länge	Larghezza L2 Width Largeur Ancho Breite	Altezza L3 Height Hauteur Altura Höhe	Imballo Packing Emballage Embalaje Verpackung	Inner Pces	Master Pces
IS781	287 mm	32 mm	232 mm	Colour box	4	8
IS783	330 mm	78.5 mm	289 mm	Colour box	-	2
IS786	362 mm	59 mm	304 mm	Colour box	-	2

IS781



IS783



IS786

