SCHEDA TECNICA Visualizza Online
DATA SHEET / FICHE PRODUIT / FICHA PRODUCTO / DATENBLATT

SL238

LED wall light with solar charge 600 lumens, with motion detector

8 003910 108233 >

PACKING /	INNER pcs	MASTER pcs
Colour box	**6**	**24**

DATI TECNICI / SPECIFICATION / CARACTÉRISTIQUES / CARACTERISTICAS / SPEZIFIKATIONEN

Product name:	TECNO
Power supply:	SOLAR
Power supply included:	YES
Type of power supply:	SOLAR PANEL
Batteries included:	YES
Battery (type):	18650
Battery (capacity mAh):	2200
Battery technology:	LITHIUM-ION
Battery weight:	0.045
Charging Time (hrs):	12
Runtime (hrs):	8
Light technology:	2835 SMD LED
Power (W):	10
Lumen:	600
Kelvin degrees:	4000K
Light beam:	DIFFUSE
Materials:	PLASTIC - PC
Extendable:	NO
Insulation class:	III
Colour:	BLACK
Switch:	YES
Protection degree (IP):	IP44
Lamp included:	YES
Guarantee:	2 ANNI
Product width (mm):	200
Product depth (mm):	40
Product height (mm):	100
Net weight kg):	0,343

DESCRIZIONE / DESCRIPTION / DESCRIPTION / DESCRIPCIÓN / BESCHREIBUNG

Solar LED wall lamp in anti-UV polycarbonate and ABS; contemporary and extremely refined design; resistant to impact and atmospheric agents; the electronic part is particularly water resistant.Operation: the lamp recharges during the day, using the sun's rays. 3 modes of use: 1) always on: the light turns on automatically when the sun goes down for 8 hours. 20 continuous lumens: the lamp is then used as a street lamp; it will turn off automatically at dawn. 2) mixed mode: the light turns on automatically when the sun goes down: 20 continuous lumens; in addition, the motion detector is activated: 400 lumens for 8 seconds if it detects a movement; it will turn off automatically at dawn. 3) detection only mode: the lamp will light up for 8 seconds at 600 lumens if it detects movement in the covered area; acts as both a courtesy light and a safety light.The lamp is fitted with the latest generation SMD LEDs with high-performance diffusers: the light is homogeneous; 4000K light: neither too hot nor too cold.Equipped with 6V 0.3a monocrystalline solar panel and Li-Ion 2200mAh battery; it can be fixed with dowels or using the convenient peg provided; autonomy: up to 8 hours depending on the charge received during the day.Dimensions: 205mm x 106mm x 40mm; simple fixing with two anchors.

DATI LOGISTICI / LOGISTIC INFORMATION / DONNEES LOGISTIQUES / DATOS LOGÍSTICOS / LOGISTISCHE DATEN

Packing type:	Colour box
Length of the packed product (mm):	215
Packed product width (mm):	50
Height of packed product (mm):	115
Peso prodotto imballato (Kg):	0.4
Inner quantity:	6
Master quantity:	24
ITF INNER:	18003910108230
ITF MASTER:	28003910108237
DEEE (France only):	0.07



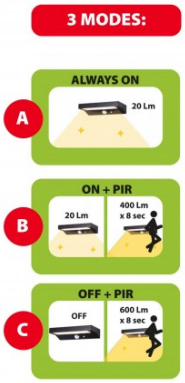

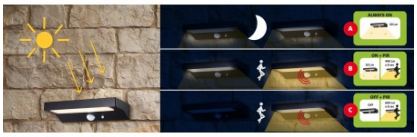

Link al Prodotto: Visualizza Online
www.velamp.com / customerservice@velamp.com