

185W Hyskeir Pro 2 Highbay, 840, 1-10V




Order Code: IND167v2-C10

Photometric Data	
Lumens	26000
Colour Rendering Index (CRI)	80-89
LPW (lm/W)	130
Colour Temperature (K)	4000 - 4000
SDCM	5
Beam Angle (°)	120
Light Distribution	Symmetric
Lens / Reflector	None

Life Data	
Rated Life @ 25°C (Hrs)	90000
Rated Life @ Tmax (Hrs)	50000
Rated Life L70/B10 @ 25°C	90000
Rated Life L80/B10 @ 25°C	60000
Rated Life L90/B10 @ Tmax (Hrs)	25000
Rated Life L80/B10 @ Tmax (Hrs)	50000
Rated Life L90/B10 @ 25°C	30000

Electrical Data	
Thermal Overload Protection	Yes
Overvoltage Protection	Yes
Input (W)	200
Input (V)±10%	220 - 240
Voltage Type	AC
Input Current (A)	0.95
Power Factor	0.95
No. Per C16 Breaker	14
Electrical Class	I
Type of Wiring	Ending
Wiring X-sec (mm ²)	Yes
1-10V Dimming	Yes
LED Nominal Current (mA)	1500 - 1500
Short Circuit Protection	Yes

Physical Data	
With Protective Cover	Yes
Degree of Protection (IP)	IP65
Mounting Method	Pendant
Housing Colour	Black
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	215
Diameter (mm)	260
Weight (kg)	4
Lamp Type	LED Not Exchangeable
Reflector Material	Without Reflector
Ball Proof	Yes
Impact Strength	IK08
Warranty (year)	5

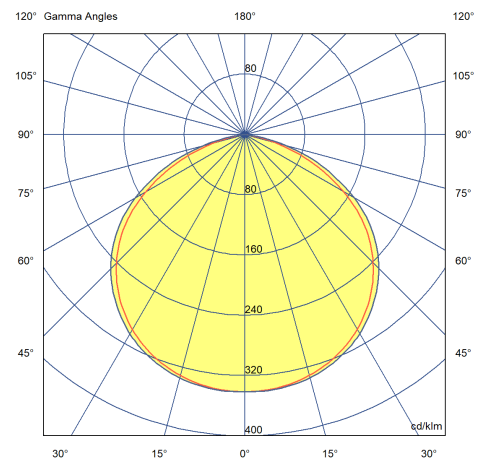

Order Code: IND167v2-C10

Environmental Data

Ambient Rated Temperature Range (°C)	-30 to 40
--------------------------------------	-----------

Accessories

ACS137 - 60° Aluminium Reflector

ACS142 - 90° Polycarbonate Reflector

ACS138 - 90° Aluminium Reflector

ACS141 - Surface Mounting Bracket

ACS140 - Programming Remote for Microwave Sensors

ACS140v2 - V2 Programming Remote for Microwave Sensors

Logistical Data

Item Gross Weight (kg)	4.5
------------------------	-----

Packaging Length (cm)	32
-----------------------	----

Packaging Width (cm)	32
----------------------	----

Packaging Height (cm)	21
-----------------------	----