

Technical Data Sheet

CODE 11100

MG 100/4" LL

In-line axial fans



Certifications



IMQ



CE



IMQ Performance



CCC



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,10	Weight (Kg)	0,43
Absorbed Power max (W)	18	Delivery max (l/s)	22,2
Frequency (Hz)	50	Delivery max (m ³ /h)	80
Insulation Class	II°	Pressure max (mmH ₂ O)	2,6
IP	X4	Pressure max (Pa)	25
Max ambient temperature for continuous operation (°C)	40	RPM	2415
Voltage (V)	220-240	Sound Pressure level Lp [dB (A)] 3m	39

DIMENSIONS

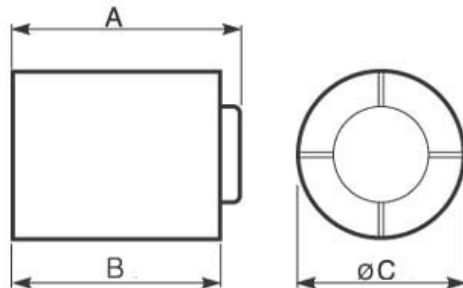

Size A (mm)	Ø 99
Size B (mm)	92
Size C (mm)	89

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11100

MG 100/4" LL


In-line axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 80 m³/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controllers.

CURVES

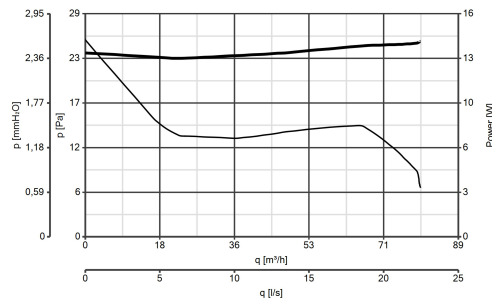

ACCESSORIES



STAFFA PER

SOTTOTETTO/SOFFITTO (COMANDO EL.)

D.90/100

Code 22259

C 1.5

(COMANDO EL.)

1.5 A

Code 12966

SCNRB

SCAT.COM.NON

REV.INCASSO

Code 12971

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com