

Technical Data Sheet

CODE 11103

MG 120/5" T LL

In-line axial fans



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

| | | | |
|---|---------|-------------------------------------|------|
| Absorbed Current max (A) | 0,12 | Weight (Kg) | 0,56 |
| Absorbed Power max (W) | 20 | Delivery max (l/s) | 44,4 |
| Frequency (Hz) | 50 | Delivery max (m ³ /h) | 160 |
| Insulation Class | II° | Pressure max (mmH2O) | 4,5 |
| IP | X4 | Pressure max (Pa) | 44 |
| Max ambient temperature for continuous operation (°C) | 50 | RPM | 2250 |
| Voltage (V) | 220-240 | Sound Pressure level Lp [dB (A)] 3m | 43 |

DIMENSIONS

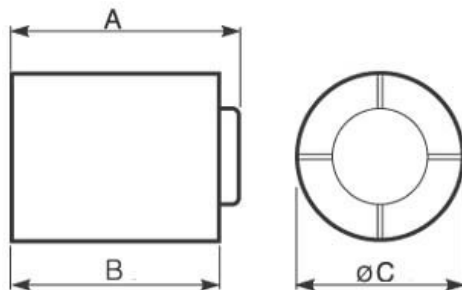

| | |
|-------------|-------|
| Size A (mm) | Ø 119 |
| Size B (mm) | 107,5 |
| Size C (mm) | 100 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11103

MG 120/5" T LL

In-line axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 160 m³/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controllers.

ACCESSORIES



STAFFA PER SOTTOTETTO/SOFFITTO D.120

Code 22260

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com