

Technical Data Sheet

CODE 11110

MG 90/3,5"

In-line axial fans



Certifications



IMQ



CE



IMQ Performance




EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,10	Voltage (V)	220-240
Absorbed Power max (W)	18	Weight (Kg)	0,45
Frequency (Hz)	50	Delivery max (l/s)	18
Insulation Class	II°	Delivery max (m³/h)	65
IP	X4	Pressure max (mmH2O)	2,1
Max ambient temperature for continuous operation (°C)	40	Pressure max (Pa)	21
Nominal Diameter (mm)	100	RPM	2450
		Sound Pressure level Lp [dB (A)] 3m	38

DIMENSIONS

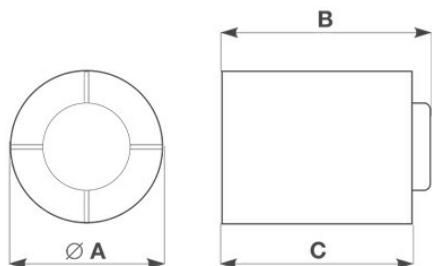

Size A (mm)	∅
	92,5
Size B (mm)	92
Size C (mm)	89

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11110

MG 90/3,5"


In-line axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 90 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 65 m³/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controllers.


CURVES

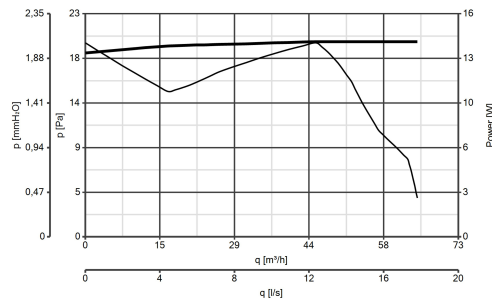

ACCESSORIES



C 1.5
(COMANDO EL.
1.5 A)
Code 12966



STAFFA PER
SOTTOTETTO/SOFFITTO
D.90/100
Code 22259



SCNRB
SCNRB.COM.NON
REV.INCASSO
Code 12971



KIT SCB
(TRASF.E.C.)
Code 22481

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com