

Technical Data Sheet

CODE 11212

M 100/4" T LL

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

| | | | |
|---|-----|-------------------------------------|---------|
| Absorbed Current max (A) | 0,1 | Voltage (V) | 230-240 |
| Absorbed Power max (W) | 18 | Weight (Kg) | 0,6 |
| Frequency (Hz) | 50 | Delivery max (l/s) | 25 |
| Insulation Class | II° | Delivery max (m ³ /h) | 90 |
| IP | X4 | Pressure max (mmH2O) | 3 |
| Max ambient temperature for continuous operation (°C) | 50 | Pressure max (Pa) | 29 |
| Nominal Diameter (mm) | 100 | RPM | 2300 |
| Ø Discharge Hole (mm) | 99 | Sound Pressure level Lp [dB (A)] 3m | 37,5 |

DIMENSIONS

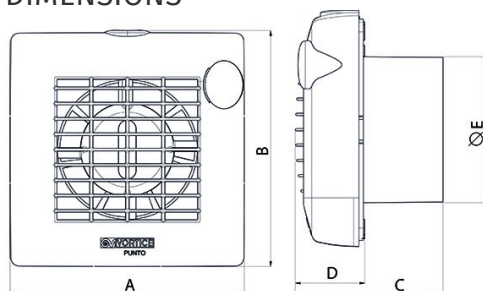

| | |
|-------------|------|
| Size A (mm) | 159 |
| Size B (mm) | 160 |
| Size C (mm) | 100 |
| Size D (mm) | 47 |
| Size E (mm) | Ø 99 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11212

M 100/4" T LL


Wall/window axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 90 m³/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

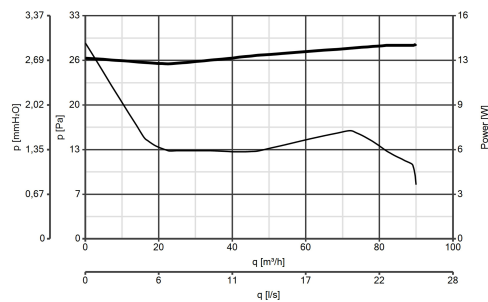

ACCESSORIES



S 100/4
Code 22154



F 100/4"
Code 22131

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com