

# Technical Data Sheet

CODE 11302

## M 120/5" LL

Wall/window axial fans



IMQ




IMQ Performance



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,12	Voltage (V)	220-240
Absorbed Power max (W)	20	Weight (Kg)	0,8
Frequency (Hz)	50	Delivery max (l/s)	48,6
Insulation Class	II°	Delivery max (m³/h)	175
IP	X4	Pressure max (mmH2O)	4,5
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	44
Nominal Diameter (mm)	120	RPM	2100
Ø Discharge Hole (mm)	119	Sound Pressure level Lp [dB (A)] 3m	39,5

### DIMENSIONS

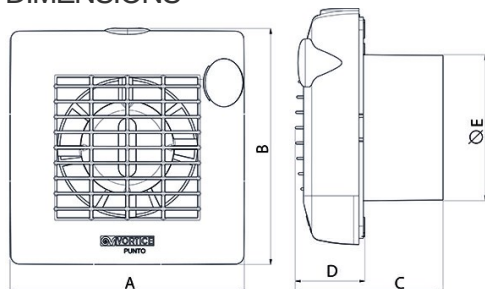

Size A (mm)	179
Size B (mm)	181
Size C (mm)	110
Size D (mm)	47
Size E (mm)	Ø 119

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 11302

## M 120/5" LL

Wall/window axial fans




### DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing

- Vortice speed controller.

### CURVES

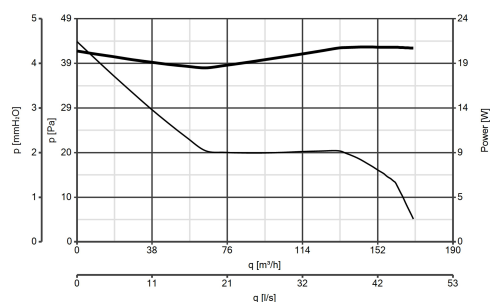

### ACCESSORIES



← SCNRB  
SCAT.COM.NON  
REV.INCASSO  
Code 12971



C 1.5  
(COMANDO EL.  
1.5 A)  
Code 12966



KIT SCB  
(TRASF.E.C.)  
Code 22481



S 120/5  
Code 22155



#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: prevendita@vortice-italy.com