

Technical Data Sheet

CODE 11312

M 120/5" T LL

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

| | | | |
|---|------|-------------------------------------|---------|
| Absorbed Current max (A) | 0,12 | Voltage (V) | 220-240 |
| Absorbed Power max (W) | 20 | Weight (Kg) | 0,8 |
| Frequency (Hz) | 50 | Delivery max (l/s) | 48,6 |
| Insulation Class | II° | Delivery max (m ³ /h) | 175 |
| IP | X4 | Pressure max (mmH2O) | 4,5 |
| Max ambient temperature for continuous operation (°C) | 50 | Pressure max (Pa) | 44 |
| Nominal Diameter (mm) | 120 | RPM | 2100 |
| Ø Discharge Hole (mm) | 119 | Sound Pressure level Lp [dB (A)] 3m | 39,5 |

DIMENSIONS

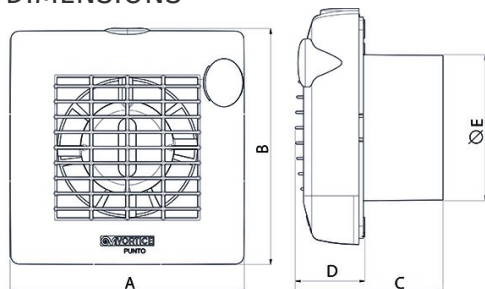

| | |
|-------------|-------|
| Size A (mm) | 179 |
| Size B (mm) | 181 |
| Size C (mm) | 110 |
| Size D (mm) | 47 |
| Size E (mm) | Ø 119 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11312

M 120/5" T LL


Wall/window axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 175 m³/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

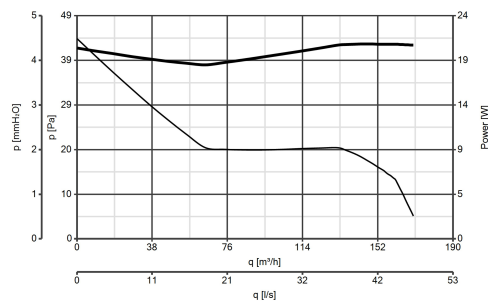

ACCESSORIES



S 120/5

Code 22155



F 120/5"

Code 22132

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com