

# Technical Data Sheet

CODE 11547

## QE 100/60 LL T PIR

Centrifugal duct fans



IMQ



IMQ




CE

### TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	16	Delivery 1st speed (m <sup>3</sup> /h)	60
Frequency (Hz)	50	Max delivery at max speed (l/s)	27,8
Insulation Class	II°	Max delivery at max speed (m <sup>3</sup> /h)	100
IP	45	Pressure - 1st speed (mmH2O)	35
Max ambient temperature for continuous operation (°C)	50	Pressure - 1st speed (Pa)	343
Max. absorbed Current at max. speed (A)	0,17	Pressure max - max speed (mmH2O)	36
Max. absorbed Current at min. speed (A)	0,14	Pressure max - max speed (Pa)	353
Max. absorbed power at max speed (W)	26	RPM max	1570
Nominal Diameter (mm)	80	RPM min	1170
Ø Discharge Hole (mm)	70	Sound power Lw [dB(A)] - min speed	45,5
Voltage (V)	220-240	Sound power Lw [dB(A)] - max speed	52
Weight (Kg)	2,33	zU/4 Sae//Sae%aeCat%Z f1 Saeer%af [dB(A)] 3 m max speed	31,5
Delivery 1st speed (l/s)	16,7	zU/4 Sae//Sae%aeCat%Z f1 Saeer%af [dB(A)] 3 m min speed	25

### DIMENSIONS

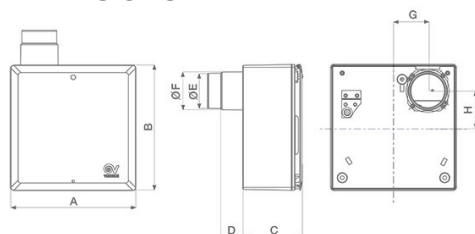

Size A (mm)	262
Size B (mm)	262
Size C (mm)	115,5
Size D (mm)	80
Size E (mm)	73
Size F (mm)	79
Size G (mm)	71,5
Size H (mm)	90

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

