

# Technical Data Sheet

CODE 11641

## M 100/4" P

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



CCC



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,1	Voltage (V)	220-240
Absorbed Power max (W)	18	Weight (Kg)	0,6
Frequency (Hz)	50	Delivery max (l/s)	25
Insulation Class	II°	Delivery max (m <sup>3</sup> /h)	90
IP	X4	Pressure max (mmH <sub>2</sub> O)	3
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	29
Ø Discharge Hole (mm)	99	RPM	2300
		Sound Pressure level Lp [dB (A)] 3m	159

### DIMENSIONS

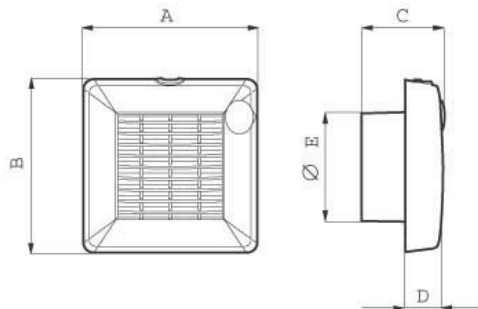

Size A (mm)	159
Size B (mm)	160
Size C (mm)	100
Size D (mm)	47
Size E (mm)	Ø 99

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 11641

## M 100/4" P

Wall/window axial fans



### DESCRIPTION

- Version with built-in switch operated by pullcord mounted to edge of grille.
- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 90 m<sup>3</sup>/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controller.

### ACCESSORIES



**F 100/4"**

Code 22131



**S 100/4**

Code 22154

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)