

Technical Data Sheet

CODE 11784

M 120/5" A PIR LL

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,12	Voltage (V)	220-240
Absorbed Power max (W)	20	Weight (Kg)	0,8
Frequency (Hz)	50	Delivery max (l/s)	48,6
Insulation Class	II°	Delivery max (m ³ /h)	175
IP	X4	Pressure max (mmH2O)	4,5
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	44
Nominal Diameter (mm)	120	RPM	2100
Ø Discharge Hole (mm)	119	Sound Pressure level Lp [dB (A)] 3m	39,5

DIMENSIONS

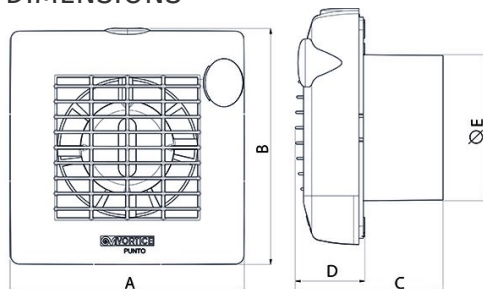

Size A (mm)	179
Size B (mm)	181
Size C (mm)	110
Size D (mm)	47
Size E (mm)	Ø 119

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11784

M 120/5" A PIR LL

Wall/window axial fans



DESCRIPTION


- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 175 m³/h.
- Incorporates electronic presence detector with infrared sensor, and

electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3'), after the room has been vacated.

- Equipped with system by which the louvres of the grille are opened and closed automatically.

- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

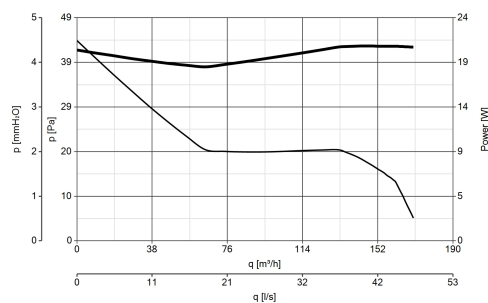

ACCESSORIES



F 120/5"

Code 22132



S 120/5

Code 22155

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com