

Technical Data Sheet

CODE 11851

M 150/6" P

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance



CCC



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

| | | | |
|---|------|-------------------------------------|---------|
| Absorbed Current max (A) | 0,15 | Voltage (V) | 220-240 |
| Absorbed Power max (W) | 30 | Weight (Kg) | 1,1 |
| Frequency (Hz) | 50 | Delivery max (l/s) | 93,1 |
| Insulation Class | II° | Delivery max (m ³ /h) | 335 |
| IP | X4 | Pressure max (mmH ₂ O) | 6 |
| Max ambient temperature for continuous operation (°C) | 50 | Pressure max (Pa) | 59 |
| Ø Discharge Hole (mm) | 156 | RPM | 2100 |
| | | Sound Pressure level Lp [dB (A)] 3m | 46 |

DIMENSIONS

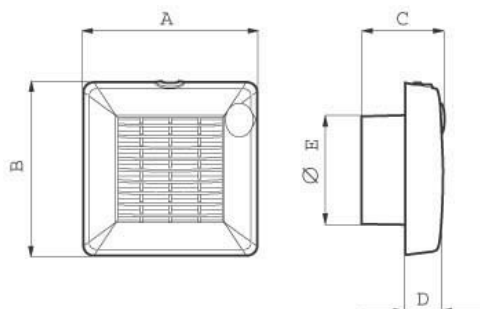

| | |
|-------------|-----|
| Size A (mm) | 214 |
| Size B (mm) | 215 |
| Size C (mm) | 117 |
| Size D (mm) | 47 |
| Size E (mm) | Ø |
| | 156 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11851

M 150/6" P


Wall/window axial fans



DESCRIPTION

- Version with built-in switch operated by pullcord mounted to edge of grille.
- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 335 m³/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controller.

CURVES

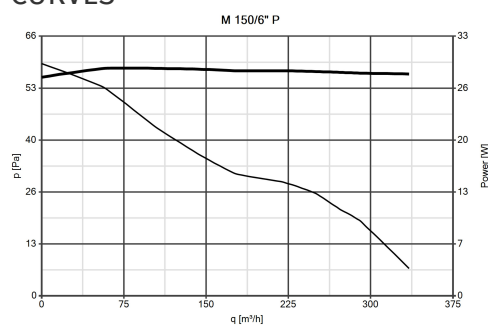

ACCESSORIES



F 150/6"
Code 22133



S 150/6
Code 22156

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com