

Technical Data Sheet

CODE 11945

MICRO 100 T HCS

Centrifugal duct fans



IMQ




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	20	Delivery 1st speed (l/s)	18
Frequency (Hz)	50	Delivery 1st speed (m³/h)	65
Insulation Class	II*	Max delivery at max speed (l/s)	25
IP	X4	Max delivery at max speed (m³/h)	90
Max ambient temperature for continuous operation (°C)	50	Pressure - 1st speed (mmH2O)	16
Max. absorbed Current at max. speed (A)	0,13	Pressure - 1st speed (Pa)	157
Max. absorbed Current at min. speed (A)	0,10	Pressure max - max speed (mmH2O)	22
Max. absorbed power at max speed (W)	28	Pressure max - max speed (Pa)	216
Nominal Diameter (mm)	100	RPM max	1600
Ø Discharge Hole (mm)	92,5/97	RPM min	1180
Voltage (V)	220-240	Sound pressure level Lp [dB (A)] 3m - max speed	39,2
Weight (Kg)	1,82	Sound pressure level Lp [dB (A)] 3m - min speed	32,3

DIMENSIONS

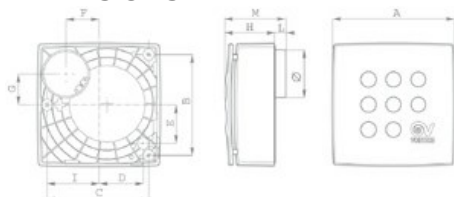

Size A (mm)	239
Size B (mm)	195
Size C (mm)	197
Size D (mm)	85
Size E (mm)	74
Size F (mm)	64
Size G (mm)	60
Size H (mm)	97
Size I (mm)	100
Size L (mm)	20
Size T (mm)	117

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11945

MICRO 100 T HCS

Centrifugal duct fans



DESCRIPTION

- Material: white ABS plastic
- Capacitor start 2-speed induction motor coupled to a forward bladed centrifugal impeller. Equipped with thermal overload cutout and self-lubricating bushings.
- Nominal diameter 100 mm.
- Electronic pcb with humidistat function piloted by RH% sensor (4 preset thresholds: 60%, 70%, 80%, 90%, selectable during installation),

designed to switch on the fan automatically. The pcb incorporates an electronic timer that shuts off the motor automatically when relative humidity returns below the threshold value. The timer setting is selectable during installation in the range 3'-20' (default setting 3').

K' u zIB8Äo ßÍJ K' u s8vBgv' !a.8 ¥æŠ- "n#ß- "ÜÏ;¡

CURVES

□

ACCESSORIES



DEVIATORE DI FLUSSO M 10/4

Code 22310

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com