

# Technical Data Sheet

CODE 12065

## MICRO 100 IT HCS

... ..



... ..




IMQ Performance



### TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	20	Delivery 1st speed (m <sup>3</sup> /h)	75
Frequency (Hz)	50	Max delivery at max speed (l/s)	31
Insulation Class	II°	Max delivery at max speed (m <sup>3</sup> /h)	110
IP	X4	Pressure - 1st speed (mmH2O)	20
Max ambient temperature for continuous operation (°C)	50	Pressure - 1st speed (Pa)	196
Max. absorbed Current at max. speed (A)	0,12	Pressure max - max speed (mmH2O)	25
Max. absorbed Current at min. speed (A)	0,10	Pressure max - max speed (Pa)	245
Max. absorbed power at max speed (W)	27	RPM max	1450
Nominal Diameter (mm)	100	RPM min	1010
Ø Discharge Hole (mm)	92,5/97	Sound pressure level Lp [dB (A)] 3m - max speed	34,3
Voltage (V)	220-240	Sound pressure level Lp [dB (A)] 3m - min speed	26,3
Weight (Kg)	1,93	Sound pressure level side extraction [dB(A)] 3m - max speed	33,5
Delivery 1st speed (l/s)	21	Sound pressure level side extraction [dB(A)] 3m - min speed	25,9

### DIMENSIONS

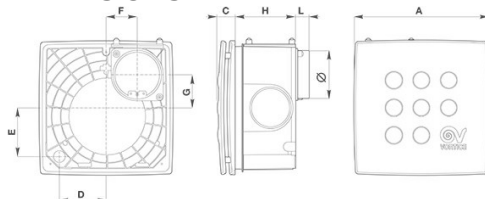

Size A (mm)	258
Size C (mm)	34
Size D (mm)	92
Size E (mm)	90
Size F (mm)	64
Size G (mm)	60
Size H (mm)	118
Size L (mm)	26

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

