

Technical Data Sheet

CODE 12103

VORT PENTA HCS

Centralised continuous ventilation unit




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	21	Weight (Kg)	4,4
Frequency (Hz)	50	Delivery 1st speed (l/s)	59.9
Insulation Class	II°	Delivery 1st speed (m³/h)	205
IP	X4	Max delivery at max speed (l/s)	94.4
Max ambient temperature for continuous operation (°C)	40	Max delivery at max speed (m³/h)	340
Max. absorbed Current at max. speed (A)	0,34	Pressure - 1st speed (mmH2O)	24.4
Max. absorbed Current at min. speed (A)	0,19	Pressure - 1st speed (Pa)	240.1
Max. absorbed power at max speed (W)	73	Pressure max - max speed (mmH2O)	43
Nominal Diameter (mm)	125	Pressure max - max speed (Pa)	421.9
Number of speeds	3	RPM max	2160
Voltage (V)	230	RPM min	1245
		Sound power level Lw [dB(A)]	31.9

DIMENSIONS

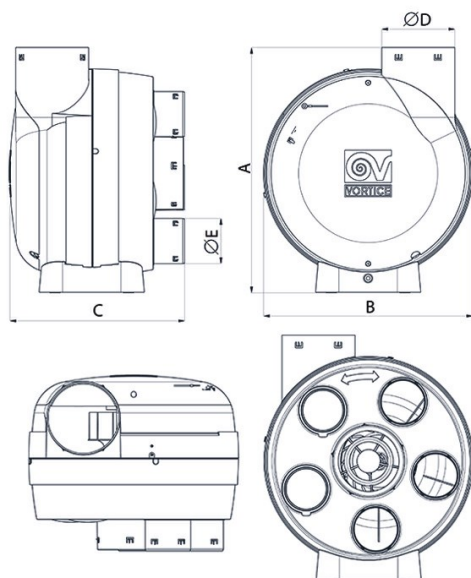

Size A (mm)	420
Size B (mm)	∅
	358
Size C (mm)	300
Size D (mm)	∅ 125
Size E (mm)	∅
	77.5

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 12103

VORT PENTA HCS

Centralised continuous ventilation unit



DESCRIPTION

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com