

Technical Data Sheet

CODE 12456

VORTICE 230/9" ARI-LL-S

Flush mounted axial fans



IMQ



IMQ



CE



IMQ Performance



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,19	Voltage (V)	220-240
Absorbed Power max (W)	35	Weight (Kg)	3,88
Frequency (Hz)	50/60	Delivery max - Extract (l/s)	188,9
Inlet	Automatico	Delivery max - Extract (m3/h)	680
Insulation Class	II°	Delivery max - Intake (l/s)	97,2
IP	X4	Delivery max - Intake (m3/h)	350
Max absorbed Power at 60Hz (W)	40	Delivery max (m³/h)	680
Max ambient temperature for continuous operation (°C)	50	RPM	1160
Max ambient temperature for continuous operation 60Hz (°C)	50	Rpm - Exhaust	1160
Ø Discharge Hole (mm)	335 + 340	Rpm - Supply	1260
		Sound Pressure level Lp [dB (A)] 3m	45,3

DIMENSIONS

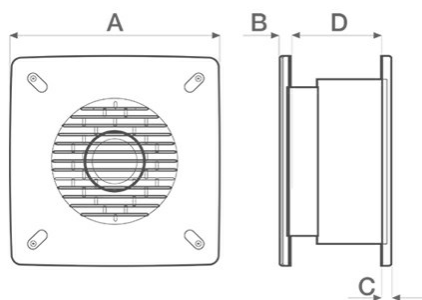

Ø wall hole	335/340
Size A (mm)	400
Size B (mm)	10
Size C (mm)	11
Size D (mm)	180

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 12456

VORTICE 230/9" ARI-LL-S


Flush mounted axial fans



DESCRIPTION

- Model designed for installation recessed into wall.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight)
- Nominal diameter 230 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing

CURVES

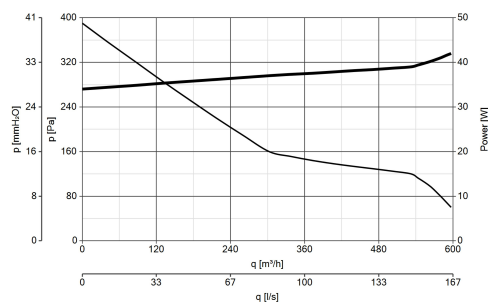

ACCESSORIES



CR5N
Code 12941



CREN
Code 12944



CTEMP
Code 12992



CSMOKE
Code 12993

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com