

# Technical Data Sheet

CODE 15041

## TORRETTA TRM 15 ED 4P

Centrifugal roof fans with horizontal discharge for hot fumes extraction




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,60	Number of Poles	4
Absorbed Power max (W)	140	Voltage (V)	220-240
Frequency (Hz)	50	Weight (Kg)	19
Insulation Class	I°	Delivery max (l/s)	389
Max ambient temperature for continuous operation (°C)	90	Delivery max (m³/h)	1400
Motor IP protection	55	Pressure max (mmH2O)	24
Nominal Diameter (mm)	250	Pressure max (Pa)	235
Number of Phases (Ph)	1	RPM	1315
		Sound Pressure level Lp [dB (A)] 3m	58,5

### DIMENSIONS

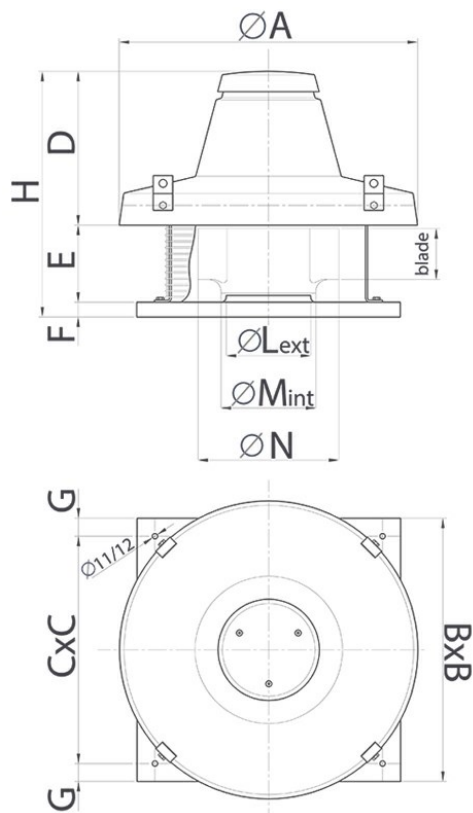

Size A (mm)	600
Size B (mm)	410
Size C (mm)	357
Size D (mm)	309
Size E (mm)	166
Size F (mm)	38
Size G (mm)	26,5
Size H (mm)	513
Size L (mm)	206
Size M (mm)	211
Size N (mm)	319

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 15041

## TORRETTA TRM 15 ED 4P


Centrifugal roof fans with horizontal discharge for hot fumes extraction



### DESCRIPTION

- Centrifugal roof fan suitable for extracting hot fumes at up to 400 °C for 120 minutes.
- Base manufactured from phosphated pressed steel, epoxy powder coated with hammered effect finish, guaranteeing long-term resistance to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Motor mounting plate made of steel with galvanization surface treatment.
- Pressed steel motor cover: pickled and phosphated surface, polyester powder coated and oven baked finish, colour grey, with hammered texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated finish, colour black.
- Centrifugal impeller with self-cleaning backward curved blades, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3), made of electrolytically galvanized pressed steel.
- 1 speed single phase AC motor with shaft turning in ball bearings, size to UNEL MEC standard, flange B5, self-ventilating. Motor insulation class H, with metal cooling fan and cable gland.
- Maximum air flow: 1400 m<sup>3</sup>/h.
- Equipped with a motor start capacitor that must be installed remotely from the fan so that it cannot be damaged through direct exposure to heat.
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.

### CURVES

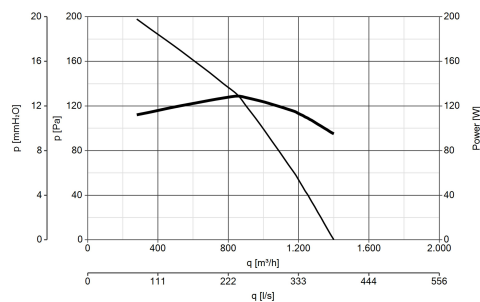


### ACCESSORIES



**IRM 30**  
Code 12921



**TR-CU 10/15**  
**(CONTROTELAIO**  
**DI BASE U.)**  
Code 22511



**TR-G 10/15**  
**(GRIGLIA DI**  
**PROTEZIONE)**  
Code 22700



**IREM 3 CD**  
**99250080**  
Code 12931

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)