

# Technical Data Sheet

CODE 15045

## TORRETTA TRT 20 ED 4P

Centrifugal roof fans with horizontal discharge for hot fumes extraction




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	208	Weight (Kg)	33
Frequency (Hz)	50	Delivery 1st speed (l/s)	500
Insulation Class	1°	Delivery 1st speed (m <sup>3</sup> /h)	1800
Max ambient temperature for continuous operation (°C)	90	Max delivery at max speed (l/s)	611
Max. absorbed Current at max. speed (A)	0,53	Max delivery at max speed (m <sup>3</sup> /h)	2200
Max. absorbed Current at min. speed (A)	0,32	Pressure - 1st speed (mmH2O)	24
Max. absorbed power at max speed (W)	270	Pressure - 1st speed (Pa)	235
Motor IP protection	55	Pressure max - max speed (mmH2O)	34
Nominal Diameter (mm)	250	Pressure max - max speed (Pa)	334
Number of Phases (Ph)	3	RPM max	1400
Number of Poles	4	RPM min	1050
Voltage (V)	380-415	Sound Pressure level Lp [dB (A)] 3m	68

### DIMENSIONS

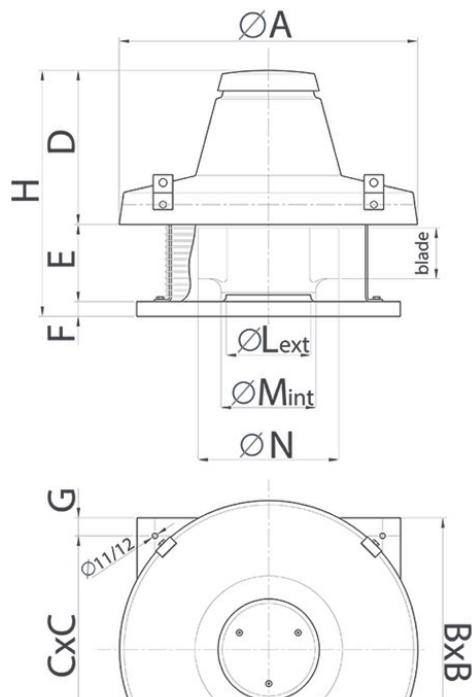

Size A (mm)	780
Size B (mm)	550
Size C (mm)	500
Size D (mm)	397
Size E (mm)	226
Size F (mm)	38
Size G (mm)	25
Size H (mm)	661
Size L (mm)	231
Size M (mm)	236,5
Size N (mm)	359

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premando 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 15045

## TORRETTA TRT 20 ED 4P


Centrifugal roof fans with horizontal discharge for hot fumes extraction



### DESCRIPTION

- Centrifugal roof fan suitable for extracting hot fumes at up to 400 °C for 120 minutes.
- Base manufactured from phosphated pressed steel, epoxy powder coated with hammered effect finish, guaranteeing long-term resistance to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Motor mounting plate made of steel with galvanization surface treatment.
- Pressed steel motor cover: pickled and phosphated surface, polyester powder coated and oven baked finish, colour grey, with hammered texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated finish, colour black.
- Centrifugal impeller with self-cleaning backward curved blades, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3), made of electrolytically galvanized pressed steel.
- Dahlander 2 speed three-phase AC motor with shaft turning in ball bearings, size to UNEL MEC standard, flange B5, self-ventilating. Motor insulation class H, with metal cooling fan and cable gland.
- Minimum air flow 1800 m<sup>3</sup>/h  
Maximum air flow: 2200 m<sup>3</sup>/h.
- Equipped with a motor start capacitor that must be installed remotely from the fan so that it cannot be damaged through direct exposure to heat.
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.


### CURVES

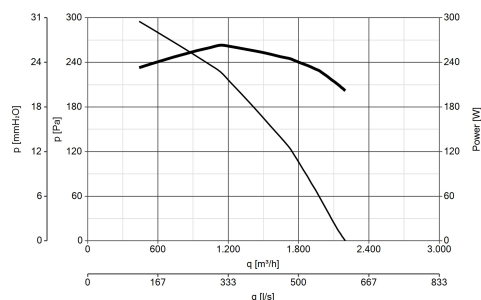


### ACCESSORIES



IRT 15  
Code 12923



TR-CU 20/30/50  
(CONTROTELAIO  
DI BASE U)  
Code 22512



TR-G 20/30/50  
(GRIGLIA DI  
PROTEZIONE)  
Code 22710



TR-CVT  
(COMMUTATORE  
VELOCITA'  
TRIF.)  
Code 22910

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)