

# Technical Data Sheet

CODE 15356

## TORRETTA TRM 30 E 4P

Centrifugal roof fans with horizontal discharge




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	1,80	Number of Poles	4
Absorbed Power max (W)	400	Voltage (V)	220-240
Frequency (Hz)	50	Weight (Kg)	23
Insulation Class	I°	Delivery max (l/s)	917
Max ambient temperature for continuous operation (°C)	70	Delivery max (m³/h)	3300
Motor IP protection	55	Pressure max (mmH2O)	44
Nominal Diameter (mm)	300	Pressure max (Pa)	432
Number of Phases (Ph)	1	RPM	1425
		Sound Pressure level Lp [dB (A)] 3m	67

### DIMENSIONS

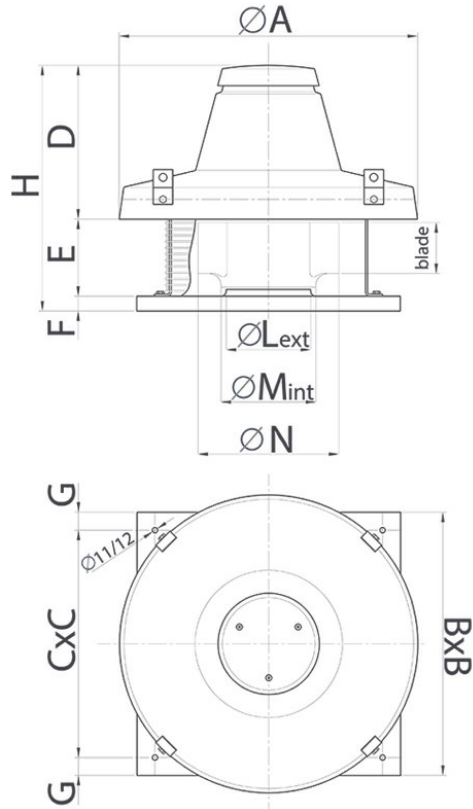

Size A (mm)	780
Size B (mm)	550
Size C (mm)	500
Size D (mm)	398
Size E (mm)	146
Size F (mm)	38
Size G (mm)	25
Size H (mm)	582
Size L (mm)	Ø
	244
Size M (mm)	Ø
	265,5
Size N (mm)	Ø
	404

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 15356

## TORRETTA TRM 30 E 4P


Centrifugal roof fans with horizontal discharge



### DESCRIPTION

- Base manufactured from phosphated pressed steel, epoxy powder coated with hammered effect finish, guaranteeing long-term resistance to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Pressed steel motor cover: pickled and phosphated surface, polyester powder coated and oven baked finish, colour grey, with hammered texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated finish, colour black.
- Centrifugal impeller with self-cleaning backward curved aluminium blades, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3), and splined aluminium hub.
- 1 speed single phase AC motor, insulation class F, with shaft turning i double shielded ball bearings.
- Maximum airflow: 3300 m<sup>3</sup>/h
- Motor and fan designed for operation in ambient temperatures higher than 65 °C.
- Equipped with capacitor to EN 60252-1 standard, IMQ certified.
- Cooling fan for better dissipation of heat
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.
- Vortice speed controller.


### CURVES

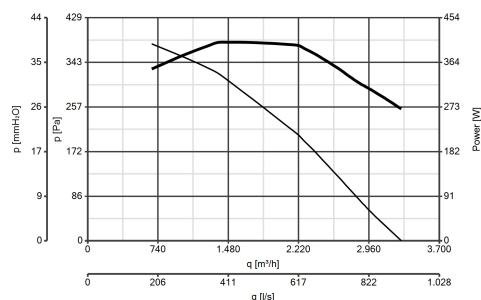

### ACCESSORIES




**IREM 3 CD**  
99250080  
Code 12931



**TR-CU 20/30/50**  
(CONTROTELAIO  
DI BASE U)  
Code 22512



**TR-B 20/30/50**  
(BOCCAGLIO  
ASPIRAZIONE)  
Code 22610



**TR-G 20/30/50**  
(GRIGLIA DI  
PROTEZIONE)  
Code 22710

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)