

Technical Data Sheet

CODE 16035

CA 200 V0 Q

In-line centrifugal fans in self-extinguishing plastic



Certifications



IMQ

IMQ Performance



C Tick Mark

EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,45	Weight (Kg)	3,1
Absorbed power 1st speed (W)	35	Delivery 1st speed (l/s)	87
Absorbed Power max (W)	104	Delivery 1st speed (m ³ /h)	310
Frequency (Hz)	50	Max delivery at max speed (l/s)	224
Insulation Class	II°	Max delivery at max speed (m ³ /h)	805
IP	44	Pressure - 1st speed (mmH2O)	22
Max ambient temperature for continuous operation (°C)	50	Pressure - 1st speed (Pa)	215
Max. absorbed Current at min. speed (A)	0.35	Pressure max - max speed (mmH2O)	44,7
Nominal Diameter (mm)	200	Pressure max - max speed (Pa)	438
∅ Discharge Hole (mm)	197	RPM max	2355
Voltage (V)	220-240	Sound pressure level Lp [dB (A)] 3m - max speed	59

DIMENSIONS



Size A (mm)	340
Size B (mm)	280
Size C (mm)	340
Size D (mm)	197
Size E (mm)	40
Size F (mm)	30
Size G (mm)	390

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16035

CA 200 V0 Q


In-line centrifugal fans in self-extinguishing plastic



DESCRIPTION

- Material: self-extinguishing PP thermoplastic resin, rated V0.
- Nominal diameter 200 mm.
- 3 speed fan through TRIO-CA optional control (cod. 12869), consisting of:
 - AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

CURVES

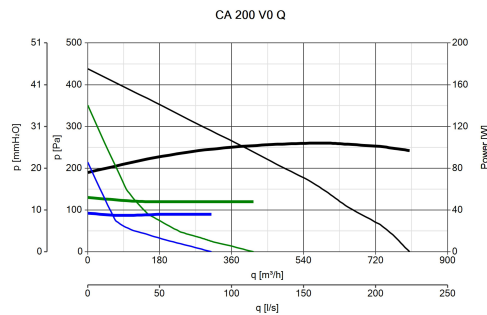

ACCESSORIES



C 1.5
(COMANDO EL.
1.5 A)
Code 12966



KIT SCB
(TRASF.E.C.)
Code 22481



CA-MU (STAFFE
DI SOSTEGNO)
Code 22674



TRIO-CA
Code 12869

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com