

Technical Data Sheet

CODE 16202

CA 150 Q ES

Energy saving in-line centrifugal fans




Certifications

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Delivery 1st speed (l/s)	16
Insulation Class	II°	Delivery 1st speed (m³/h)	56
IP	44	Max delivery at max speed (l/s)	156
Max ambient temperature for continuous operation (°C)	50	Max delivery at max speed (m³/h)	560
Nominal Current at max speed (A)	0,7	Pressure - 1st speed (mmH2O)	0,5
Nominal Current at min speed (A)	0,05	Pressure - 1st speed (Pa)	5
Nominal Diameter (mm)	150	Pressure max - max speed (mmH2O)	45
Nominal Power at max speed (W)	80	Pressure max - max speed (Pa)	441
Nominal Power at min speed (W)	3	RPM max	2670
Voltage (V)	220-240	RPM min	300
Weight (Kg)	3	Sound pressure level Lp in free field [dB(A)] 3 m max speed	49,6

DIMENSIONS

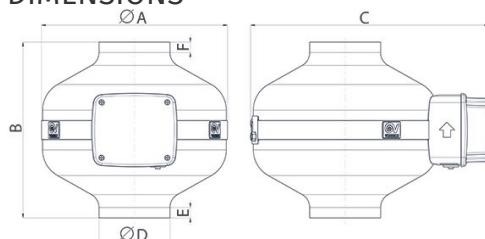

Size A (mm)	∅ 255
Size B (mm)	239
Size C (mm)	330
Size D (mm)	∅ 147
Size E (mm)	30
Size F (mm)	30

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16202

CA 150 Q ES


Energy saving in-line centrifugal fans



DESCRIPTION

- Pickled and phosphated steel housing with polyester powder-coated finish, resistant against aggressive atmospheric agents.
 - Nominal diameter: 150 mm
 - High efficiency ES (brushless) motor coupled to a backward impeller.
 - Possibility of connection to remote sensors.
 - Zinc-coated steel brackets for wall mounting, supplied as standard.
- A dedicated dip-switch allows to choice:
 - o 2 speed product functioning, settable during the installation and adjustable through optional two-speed switch,
 - o 1 speed product functioning, adjustable through 0-10V signal potentiometer (supplied as optional).

CURVES

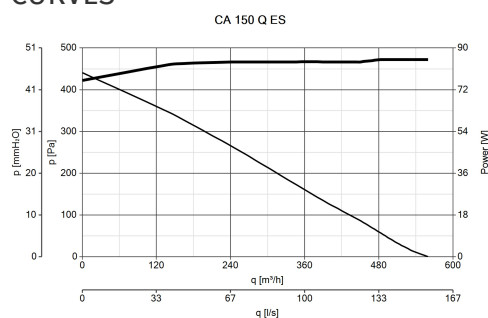

ACCESSORIES



POT
Code 12828



POT-IT
Code 12826



C PIR
Code 12998



C TIMER
Code 12999

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com