

# Technical Data Sheet

CODE 16204

## CA 160 ES

Energy saving in-line centrifugal fans




## Certifications

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Delivery 1st speed (l/s)	31
Insulation Class	II°	Delivery 1st speed (m³/h)	110
IP	44	Max delivery at max speed (l/s)	250
Max ambient temperature for continuous operation (°C)	50	Max delivery at max speed (m³/h)	900
Nominal Current at max speed (A)	1	Pressure - 1st speed (mmH2O)	0,7
Nominal Current at min speed (A)	0,05	Pressure - 1st speed (Pa)	7
Nominal Diameter (mm)	160	Pressure max - max speed (mmH2O)	50
Nominal Power at max speed (W)	120	Pressure max - max speed (Pa)	490
Nominal Power at min speed (W)	3	RPM max	2240
Voltage (V)	220-240	RPM min	300
Weight (Kg)	6,3	Sound pressure level Lp in free field [dB(A)] 3 m max speed	48,1

### DIMENSIONS

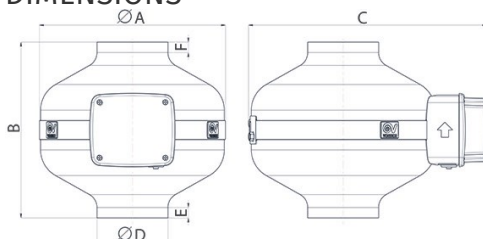

Size A (mm)	∅ 347
Size B (mm)	275
Size C (mm)	422
Size D (mm)	∅ 157
Size E (mm)	18
Size F (mm)	18

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 16204

## CA 160 ES


Energy saving in-line centrifugal fans



### DESCRIPTION

- Pickled and phosphated steel housing with polyester powder-coated finish, resistant against aggressive atmospheric agents.
- Nominal diameter: 160 mm
- High efficiency ES (brushless) motor coupled to a backward impeller.
- Possibility of connection to remote sensors.
- Zinc-coated steel brackets for wall mounting, supplied as standard.
- A dedicated dip-switch allows to choice:
  - o 2 speed product functioning, settable during the installation and adjustable through optional two-speed switch,
  - o 1 speed product functioning, adjustable through 0-10V signal potentiometer (supplied as optional).

### CURVES

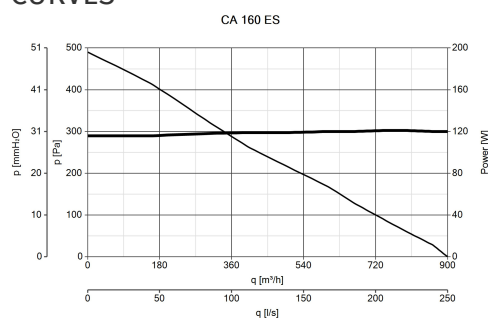

### ACCESSORIES



**POT**  
Code 12828



**POT-IT**  
Code 12826



**C PIR**  
Code 12998



**C TIMER**  
Code 12999

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)