

Technical Data Sheet


CODE 19225

PREMIUM DRY

Automatic and manual hand dryers




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	5,5	Weight (Kg)	2,3
Absorbed Power max (W)	1350	Airflow speed at max speed (m/s)	10
Frequency (Hz)	50/60	Delivery max (l/s)	35
Insulation Class	II°	Delivery max (m³/h)	130
IP	X4	Power in stand-by mode (W)	0,4060
Motor Power (W)	45	Sound pressure level Lp [dB (A)] 1m	55,2
Shock resistance rating (IK)	09	Tempo asciugatura (s)	30
Voltage (V)	220-240	Velocità aria (km/h)	36

DIMENSIONS

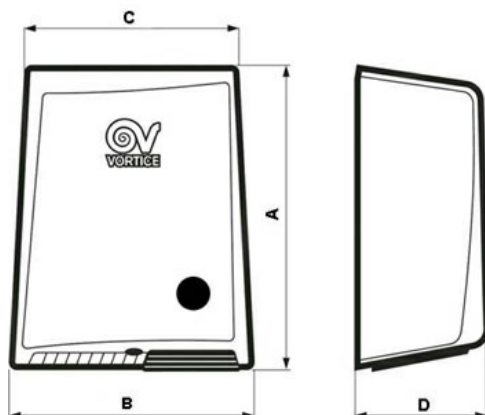

Size A (mm)	253
Size B (mm)	319
Size C (mm)	137
Size D (mm)	220

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 19225

PREMIUM DRY

Automatic and manual hand dryers



DESCRIPTION

- Front cover made of UV-resistant plastic rated V0, colour white.
- Wall-mounting flange incorporating warm air outlet grille of moulded plastic (PP).
- EC motor with thermal overload cutout and shaft turning in ball bearings, coupled to forward-bladed centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Air flow 120 m³/h.
- Dust filter.
- Dryer operated manually by push button. Equipped with electronic timer designed to shut off the fan motor automatically after a set interval, selectable during installation in the range 20"-60". Appliance shuts down automatically in the event of the air inlet grille or the warm air outlet nozzle being obstructed intentionally or accidentally.
- IMQ safety certification.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com