

Technical Data Sheet

CODE 19228

PREMIUM S DISPENSER



Certifications



IMQ




CE

TECHNICAL AND PERFORMANCE DATA

| | | | |
|------------------------|-------|------------------------------|---------|
| Absorbed Power max (W) | 6 | Shock resistance rating (IK) | 09 |
| Frequency (Hz) | 50/60 | Soap container capacity (l) | 0,5 |
| Insulation Class | II° | Voltage (V) | 220-240 |
| IP | X4 | Weight (Kg) | 1,2 |
| Motor Power (W) | 6 | Power in stand-by mode (W) | 0,3838 |

DIMENSIONS

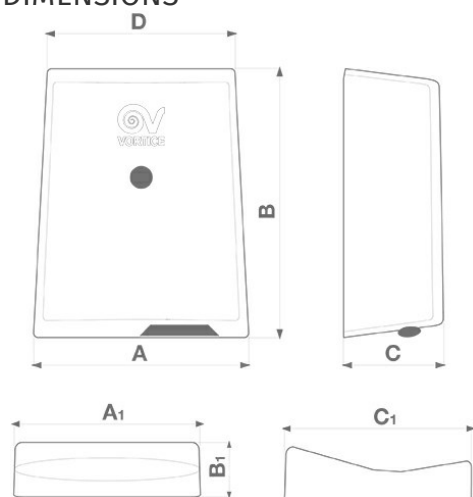

| | |
|-------------|-----|
| Size A (mm) | 181 |
| Size B (mm) | 257 |
| Size C (mm) | 91 |
| Size D (mm) | 159 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 19228

PREMIUM S DISPENSER



DESCRIPTION

- Front cover made of UV-resistant plastic rated V0, colour white.
- Plastic wall mounting flange (PP).
- Soap dispensed by peristaltic pump.
- Electronic control system equipped with infrared sensor detecting the position of the hands; activation distance between hands and sensor adjustable by way of internal trimmer.
- Removable liquid soap container.
- Drip collector.
- Overflow-proof: in the event of the liquid soap container being filled too full, there will be no risk of short-circuits occurring.
- IMQ safety certification.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com