

Technical Data Sheet

CODE 45293

VORT QBK SAL ES 10/10

Energy saving double inlet cabinet fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	4,6	Number of Phases (Ph)	1
Absorbed Power max (W)	1100	Voltage (V)	230
Frequency (Hz)	50/60	Weight (Kg)	41
Insulation Class	I°	Delivery max (l/s)	1274
Max Temperature of Exhaust Air (Continuous Operation)	40	Delivery max (m³/h)	4585
Min ambient temperature for continuous operation (°C)	-20	Pressure max (mmH2O)	120
Motor Class	F	Pressure max (Pa)	1176,9
Motor IP protection	44	RPM	1000
Nominal Diameter (mm)	400	Sound power level Lw [dB(A)]	64,4
		Sound pressure level Lp in free field [dB(A)] 3 m	43,9

DIMENSIONS

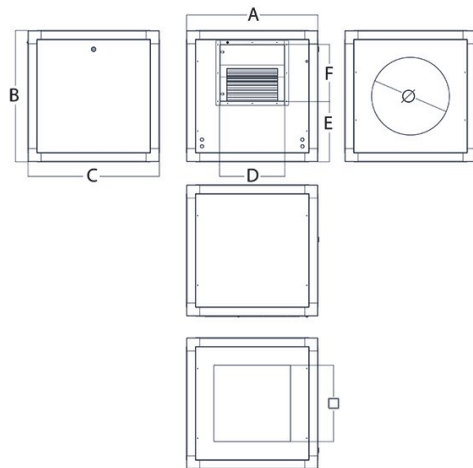

Diametro \emptyset (mm)	400
Quadro (mm)	400
Size A (mm)	600
Size B (mm)	600
Size C (mm)	600
Size D (mm)	331
Size E (mm)	248
Size F (mm)	289

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45293

VORT QBK SAL ES 10/10


Energy saving double inlet cabinet fans



DESCRIPTION

- Cabinet: extruded aluminium angle sections to UNI 9006, with 23 mm sandwich panels of zinc-coated 0.6 mm gauge sheet steel and expanded polyurethane insulation, density 40 kg/m³.
- Outlet port of rectangular section.
- Single-phase EC brushless motor, coupled to a forward curved double inlet centrifugal impeller; speed adjustable through 0-10V external potentiometer.
- Provided with 2 x ready-ported inlet panel, one for connection to a square section duct, one for connection to a circular section duct.
- 1 x inspection panel with handle and triangular key.

CURVES

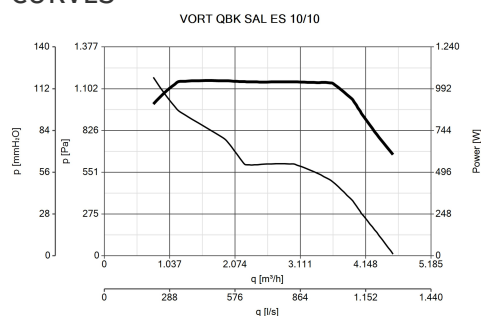


ACCESSORIES




**QBK RRC SAL
10/10
(TETTUCCIO)**

Code 24210



**QBK ABC 10/10-
12/12
(MANICOTTO
CON RETE)**

Code 24202



**QBK F
(PIEDINI)**

Code 24204



**QBK RRS 400
(NIPPLO)**

Code 24207

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com