

Technical Data Sheet

CODE 45303

VORT QBK POWER 9/7 1V 0,75

Belt driven cabinet fans



Certifications



CE




EAC

TECHNICAL AND PERFORMANCE DATA

| | | | |
|---|------|--|---------|
| Frequency (Hz) | 50 | Number of Phases (Ph) | 3 |
| Max ambient temperature for continuous operation (°C) | 40 | Number of speeds | 1 |
| Motor Class | F | Voltage (V) | 230/400 |
| Motor IP protection | 55 | Delivery max (l/s) | 694 |
| Nominal Current (A) | 1,93 | Delivery max (m³/h) | 2500 |
| Nominal Power (W) | 750 | RPM max | 1030 |
| | | Sound pressure level air extraction Lp [dB (A)] 1m - max speed | 69 |

DIMENSIONS

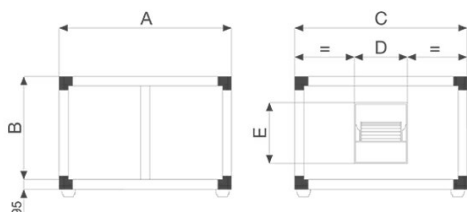

| | |
|-------------|-----|
| Size A (mm) | 790 |
| Size B (mm) | 600 |
| Size C (mm) | 600 |
| Size D (mm) | 235 |
| Size E (mm) | 265 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45303

VORT QBK POWER 9/7 1V 0,75






Belt driven cabinet fans

DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 1 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 2,500 m³/h.

ACCESSORIES



← QBK ABC 7/7-
9/9
(MANICOTTO
CON RETE)
Code 24200

QBK RRC
POWER 9/7-9/9
(TETTUCCIO)
Code 24215

QBK VCD
POWER 9/7-9/9
(SERRANDA+COMANDO)
Code 24222

QBK IG POWER
9/7-9/9
(GRIGLIA
ASPIRAZ.)
Code 24230

→

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com