

Technical Data Sheet

CODE 45304

VORT QBK POWER 9/9 1V 0,37

Belt driven cabinet fans



Certifications



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Number of Phases (Ph)	3
Max ambient temperature for continuous operation (°C)	40	Number of speeds	1
Motor Class	F	Voltage (V)	230/400
Motor IP protection	55	Delivery max (l/s)	694
Nominal Current (A)	1,11	Delivery max (m³/h)	2500
Nominal Power (W)	370	RPM max	1030
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	69

DIMENSIONS

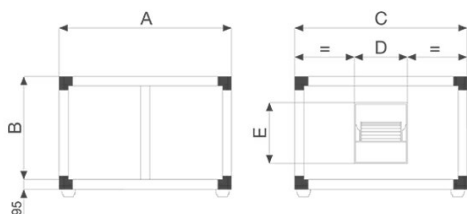

Size A (mm)	790
Size B (mm)	600
Size C (mm)	600
Size D (mm)	300
Size E (mm)	265

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45304

VORT QBK POWER 9/9 1V 0,37






Belt driven cabinet fans

DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 1 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 3,500 m³/h.

ACCESSORIES



←

**QBK ABC 7/7-
9/9
(MANICOTTO
CON RETE)**
Code 24200

**QBK RRC
POWER 9/7-9/9
(TETTUCCIO)**
Code 24215

**QBK VCD
POWER 9/7-9/9
(SERRANDA+COMANDO)**
Code 24222

**QBK IG POWER
9/7-9/9
(GRIGLIA
ASPIRAZ.)**
Code 24230

→

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com