

Technical Data Sheet

CODE 45332

VORT QBK POWER 630 1V 9,2

Belt driven cabinet fans



Certifications



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Number of Phases (Ph)	3
Max ambient temperature for continuous operation (°C)	40	Number of speeds	1
Motor Class	F	Voltage (V)	400/690
Motor IP protection	55	Delivery max (l/s)	8333
Nominal Current (A)	17,85	Delivery max (m³/h)	30000
Nominal Power (W)	9200	RPM max	670
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	80

DIMENSIONS

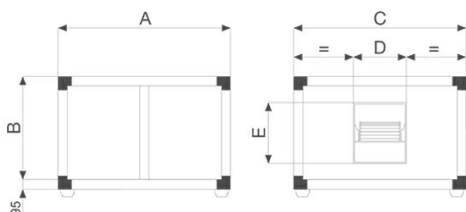

Size A (mm)	1540
Size B (mm)	1540
Size C (mm)	1540
Size D (mm)	720
Size E (mm)	720

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45332

VORT QBK POWER 630 1V 9,2




Belt driven cabinet fans

DESCRIPTION


- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 1 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 30,000 m³/h.

ACCESSORIES




←


**QBK RRC
POWER 630
(TETTUCCIO)**
Code 24221



**QBK VCD
POWER 630
(SERRANDA+COMANDO)**
Code 24228



**QBK IG POWER
630 (GRIGLIA)**
Code 24236



**QBK SS POWER
(MICRO)**
Code 24237

→

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com