

Technical Data Sheet

CODE 45347

VORT QBK POWER 9/9 2V 1,1

Belt driven cabinet fans



Certifications



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Nominal Power at min speed (W)	300
Max ambient temperature for continuous operation (°C)	40	Number of Phases (Ph)	3
Motor Class	F	Number of speeds	2
Motor IP protection	55	Voltage (V)	400
Nominal Current at max speed (A)	2,5	Max delivery at max speed (l/s)	972
Nominal Current at min speed (A)	1,2	Max delivery at max speed (m³/h)	3500
Nominal Power at max speed (W)	1000	RPM max	1600
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	73

DIMENSIONS

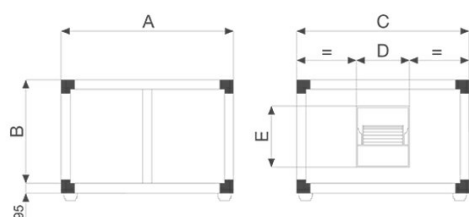

Size A (mm)	790
Size B (mm)	600
Size C (mm)	600
Size D (mm)	300
Size E (mm)	265

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45347

VORT QBK POWER 9/9 2V 1,1

Belt driven cabinet fans






DESCRIPTION

• Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.

• 2 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.

• Maximum air flow: 3,500 m3/h.

ACCESSORIES



QBK ABC 7/7-9/9
(MANICOTTO CON RETE)
Code 24200

QBK RRC POWER 9/7-9/9
(TETTUCCIO)
Code 24215

QBK VCD POWER 9/7-9/9
(SERRANDA+COMANDO)
Code 24222

QBK IG POWER 9/7-9/9
(GRIGLIA ASPIRAZ.)
Code 24230



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com