

Technical Data Sheet

CODE 45349

VORT QBK POWER 10/10 2V 0,75

Belt driven cabinet fans



Certifications



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Nominal Power at min speed (W)	250
Max ambient temperature for continuous operation (°C)	40	Number of Phases (Ph)	3
Motor Class	F	Number of speeds	2
Motor IP protection	55	Voltage (V)	400
Nominal Current at max speed (A)	1,75	Max delivery at max speed (l/s)	1250
Nominal Current at min speed (A)	0,8	Max delivery at max speed (m³/h)	4500
Nominal Power at max speed (W)	660	RPM max	1050
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	71

DIMENSIONS

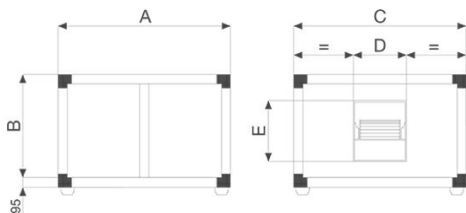

Size A (mm)	1040
Size B (mm)	700
Size C (mm)	700
Size D (mm)	335
Size E (mm)	295

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45349

VORT QBK POWER 10/10 2V 0,75




Belt driven cabinet fans


DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 2 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 4,500 m³/h.


ACCESSORIES




← QBK ABC 10/10-
12/12
(MANICOTTO
CON RETE)
Code 24202



QBK RRC
POWER 10/10
(TETTUCCIO)
Code 24216



QBK VCD
POWER 10/10
(SERRANDA+COMANDO)
Code 24223



QBK IG POWER
10/10 (GRIGLIA
INSERIBILE)
Code 24231

→

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com