

Technical Data Sheet

CODE 45350

VORT QBK POWER 10/10 2V 1,1



Belt driven cabinet fans




3~ 400V 50Hz



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Nominal Power at min speed (W)	300
Max ambient temperature for continuous operation (°C)	40	Number of Phases (Ph)	3
Motor Class	F	Number of speeds	2
Motor IP protection	55	Voltage (V)	400
Nominal Current at max speed (A)	2,5	Max delivery at max speed (l/s)	1250
Nominal Current at min speed (A)	1,2	Max delivery at max speed (m³/h)	4500
Nominal Power at max speed (W)	1000	RPM max	1345
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	73

DIMENSIONS

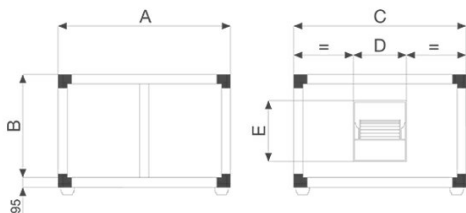

Size A (mm)	1040
Size B (mm)	700
Size C (mm)	700
Size D (mm)	335
Size E (mm)	295

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45350

VORT QBK POWER 10/10 2V 1,1




Belt driven cabinet fans

DESCRIPTION


• Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene

• 2 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.


ACCESSORIES




← QBK ABC 10/10-12/12 (MANICOTTO CON RETE)
Code 24202



QBK RRC POWER 10/10 (TETTUCCIO)
Code 24216



QBK VCD POWER 10/10 (SERRANDA+COMANDO)
Code 24223



QBK IG POWER 10/10 (GRIGLIA)
Code 24231



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com