

Technical Data Sheet

CODE 45355

VORT QBK POWER 12/12 2V 2,2

Belt driven cabinet fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Nominal Power at min speed (W)	600
Max ambient temperature for continuous operation (°C)	40	Number of Phases (Ph)	3
Motor Class	F	Number of speeds	2
Motor IP protection	55	Voltage (V)	400
Nominal Current at max speed (A)	4,5	Max delivery at max speed (l/s)	1944
Nominal Current at min speed (A)	2	Max delivery at max speed (m³/h)	7000
Nominal Power at max speed (W)	2000	RPM max	1150
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	76

DIMENSIONS

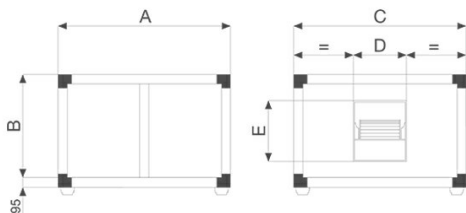

Size A (mm)	1040
Size B (mm)	790
Size C (mm)	790
Size D (mm)	395
Size E (mm)	340

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45355

VORT QBK POWER 12/12 2V 2,2







Belt driven cabinet fans

DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 2 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 7,000 m³/h.

ACCESSORIES



← QBK ABC 10/10-
12/12
(MANICOTTO
CON RETE)
Code 24202

QBK RRC
POWER 12/12
(TETTO)
Code 24217

QBK VCD
POWER 12/12
(SERRANDA+COMANDO)
Code 24224

QBK IG POWER
12/12 (GRIGLIA)
(SERRANDA)
Code 24232



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com