

Technical Data Sheet

CODE 45361

VORT QBK POWER 18/18 2V 2,2

Belt driven cabinet fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Nominal Power at min speed (W)	600
Max ambient temperature for continuous operation (°C)	40	Number of Phases (Ph)	3
Motor Class	F	Number of speeds	2
Motor IP protection	55	Voltage (V)	400
Nominal Current at max speed (A)	4,5	Max delivery at max speed (l/s)	3889
Nominal Current at min speed (A)	2	Max delivery at max speed (m³/h)	14000
Nominal Power at max speed (W)	2000	RPM max	730
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	79

DIMENSIONS

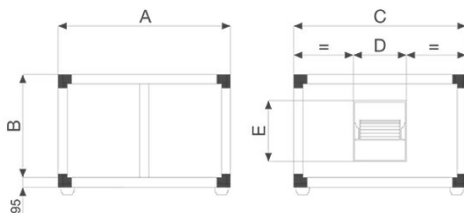

Size A (mm)	1290
Size B (mm)	1290
Size C (mm)	1290
Size D (mm)	560
Size E (mm)	480

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45361

VORT QBK POWER 18/18 2V 2,2







Belt driven cabinet fans

DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 2 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 14,000 m³/h.

ACCESSORIES



←

**QBK RRC
POWER 18/18
(TETTUCCIO)**
Code 24219

**QBK VCD
POWER 18/18
(SERRANDA+COMANDO)**
Code 24226

**QBK IG POWER
18/18 (GRIGLIA
INSERIBILE)**
Code 24234

**QBK SS POWER
(MICRO)**
Code 24237

→

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com