

Technical Data Sheet

CODE 45362

VORT QBK POWER 18/18 2V 3

Belt driven cabinet fans



Certifications



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Nominal Power at min speed (W)	1000
Max ambient temperature for continuous operation (°C)	40	Number of Phases (Ph)	3
Motor Class	F	Number of speeds	2
Motor IP protection	55	Voltage (V)	400
Nominal Current at max speed (A)	6,3	Max delivery at max speed (l/s)	3889
Nominal Current at min speed (A)	3,1	Max delivery at max speed (m³/h)	14000
Nominal Power at max speed (W)	3000	RPM max	820
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	79

DIMENSIONS

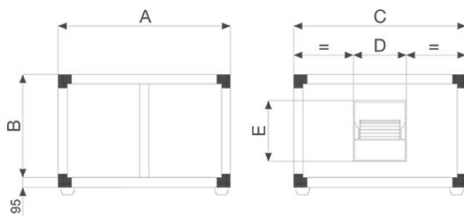

Size A (mm)	1290
Size B (mm)	1290
Size C (mm)	1290
Size D (mm)	560
Size E (mm)	480

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45362

VORT QBK POWER 18/18 2V 3




Belt driven cabinet fans


DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 2 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 14,000 m³/h.


ACCESSORIES




← QBK RRC
POWER 18/18
(TETTUCCIO)
Code 24219



QBK VCD
POWER 18/18
(SERRANDA+COMANDO)
Code 24226



QBK IG POWER
18/18 (GRIGLIA)
(ISOLAZIONE)
Code 24234



QBK SS POWER
(MICRO)
Code 24237



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com