

Technical Data Sheet

CODE 45367

VORT QBK POWER 560 2V 5,5

Belt driven cabinet fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Nominal Power at min speed (W)	2000
Max ambient temperature for continuous operation (°C)	40	Number of Phases (Ph)	3
Motor Class	F	Number of speeds	2
Motor IP protection	55	Voltage (V)	400
Nominal Current at max speed (A)	12	Max delivery at max speed (l/s)	6111
Nominal Current at min speed (A)	5,6	Max delivery at max speed (m³/h)	22000
Nominal Power at max speed (W)	6000	RPM max	770
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	78

DIMENSIONS

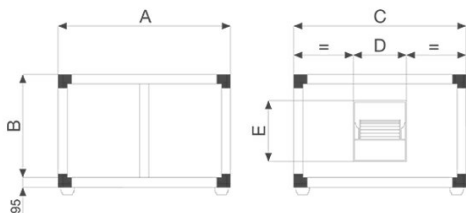

Size A (mm)	1540
Size B (mm)	1290
Size C (mm)	1290
Size D (mm)	640
Size E (mm)	640

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45367

VORT QBK POWER 560 2V 5,5




Belt driven cabinet fans

DESCRIPTION


- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 2 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 22,000 m³/h.

ACCESSORIES




←


**QBK RRC
POWER 560
(TETTUCIO)**
Code 24220



**QBK VCD
POWER 560
(SERRANDA+COMANDO)**
Code 24227



**QBK IG POWER
560 (GRIGLIA)**
Code 24235



**QBK SS POWER
(MICRO)**
Code 24237

→

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com