

Technical Data Sheet

CODE 45369

VORT QBK POWER 630 2V 4

Belt driven cabinet fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Nominal Power at min speed (W)	1500
Max ambient temperature for continuous operation (°C)	40	Number of Phases (Ph)	3
Motor Class	F	Number of speeds	2
Motor IP protection	55	Voltage (V)	400
Nominal Current at max speed (A)	9,2	Max delivery at max speed (l/s)	6111
Nominal Current at min speed (A)	5,1	Max delivery at max speed (m³/h)	22000
Nominal Power at max speed (W)	4500	RPM max	460
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	73

DIMENSIONS

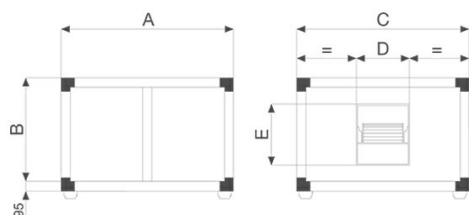

Size A (mm)	1540
Size B (mm)	1540
Size C (mm)	1540
Size D (mm)	720
Size E (mm)	720

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45369

VORT QBK POWER 630 2V 4

Belt driven cabinet fans






DESCRIPTION

• Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.

• 2 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.

• Maximum air flow: 22,000 m³/h.

ACCESSORIES



←

**QBK RRC
POWER 630
(TETTUCCIO)**
Code 24221

**QBK VCD
POWER 630
(SERRANDA+COMANDO)**
Code 24228

**QBK IG POWER
630 (GRIGLIA
ISOLAZIONE)**
Code 24236

**QBK SS POWER
(MICRO)**
Code 24237

→

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com