

Technical Data Sheet

CODE 60610

GORDON 30/12"

Oscillating table, wall-mounting and pedestal fans



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,18	Airflow speed at max speed (m/s)	1,70
Absorbed Power max (W)	35	Delivery max (m ³ /h)	2400
Frequency (Hz)	50/60	Delivery max (m ³ /min)	40,00
Insulation Class	II°	giri_minuto	1300
Max. absorbed power at max speed (W)	35	RPM	1300
Voltage (V)	220-240	Service value (m ³ /min)/W	1,143
Weight (Kg)	2,4	Sound power level Lw [dB(A)]	50,8

DIMENSIONS

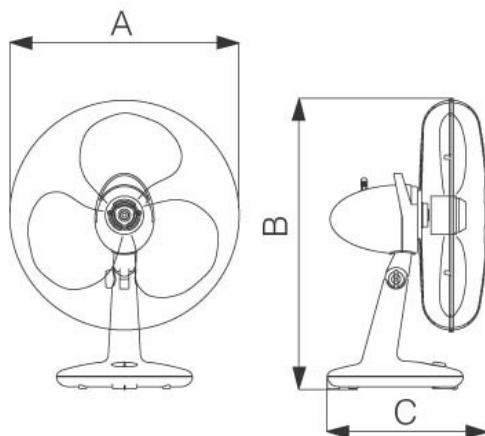

Size A (mm)	∅
	364
Size B (mm)	523,5
Size C (mm)	302,6

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 60610

GORDON 30/12"

Oscillating table, wall-mounting and pedestal fans



DESCRIPTION

- Material: plastic resin able to withstand aging induced by exposure to sunlight (UV-resistant), and formulated with an antistatic compound to prevent accumulation of dust.
- Nominal diameter 300 mm
- 3 speed asynchronous motor with thermal overload protection and shaft turning in self-aligning and self-lubricating bushings, coupled to oscillating mechanism generating movement through an angle of approx 90° maximum.
- Motor housing equipped with hinge and clamp knob for adjustment of tilt angle.
- Rotary on/off switch and fan speed selector
- Power cord with moulded plug.
- Maximum air flow 2,400 m³/h
- IMQ SAFETY and IMQ PERFORMANCE certifications

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com