

Technical Data Sheet

CODE 61001

NORDIK 1S/L 90/36 SENZA
GR.COM.



Ceiling fans with or without light



Certifications



IMQ



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,725	Weight (Kg)	6,3
Absorbed Power max (W)	175	Airflow speed at max speed (m/s)	2,65
Blades diameter	90	Delivery max (m ³ /h)	8730
Frequency (Hz)	50	Delivery max (m ³ /min)	145,50
Insulation Class	I°	RPM	235
Voltage (V)	220-240	Service value (m ³ /min)/W	0,661
		Sound power level Lw [dB(A)]	44,9

DIMENSIONS

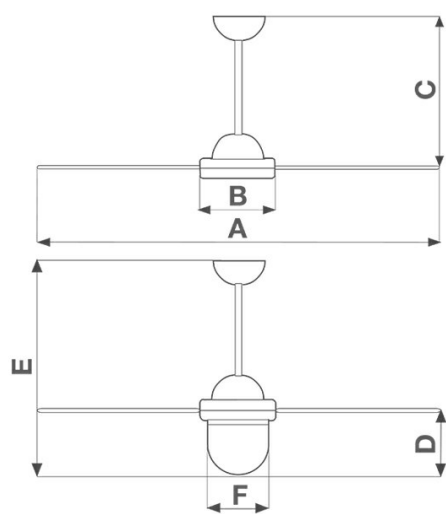

con DECOR LIGHT KIT

Size A (mm)	Ø
	914
Size B (mm)	Ø 230
Size C (mm)	495
Size D (mm)	190
Size E (mm)	685
Size F (mm)	Ø
	208

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61001

**NORDIK 1S/L 90/36 SENZA
GR.COM.**



Ceiling fans with or without light

DESCRIPTION

- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant PP, colour white.
- Nominal diameter of blades 900 mm.
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings.
- Maximum air flow 8,730 m³/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white
- Steel ceiling rod with polyester powder coated finish, colour white, length 375 mm
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Globe lampshade of laminated glass, colour opaline; E27 screw holder for lamp rated 150W max, or equivalent energy saving lamp with E27 fitting, mandatory in EU.
- Speed selectable by way of control units with on/off light switch or Telenordik 5T remote control (optional)

ACCESSORIES



**SCNRL5 UNIF. X
NK SOFFITTO**
Code 12957



**KIT SCB5
(TRASF.5 V.)**
Code 22483



TELENORDIK 5T
Code 22387



**C 2.5
(COMANDO EL.
2.5 A)**
Code 12967

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com