

Technical Data Sheet

CODE 61052


NORDIK DECOR 1S 90/36 B.
S.GR.COM. P/L



Ceiling fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,32	Weight (Kg)	7,3
Absorbed Power max (W)	70	Airflow speed at max speed (m/s)	2,58
Blades diameter	90	Delivery max (m ³ /h)	8520
Frequency (Hz)	50	Delivery max (m ³ /min)	142,00
Insulation Class	I°	RPM	235
Voltage (V)	220-240	Service value (m ³ /min)/W	2,029
		Sound power level Lw [dB(A)]	47,9

DIMENSIONS

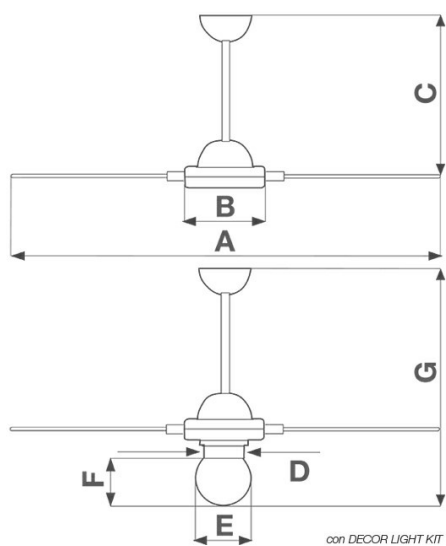

Size A (mm)	Ø
	914
Size B (mm)	Ø
	248
Size C (mm)	491
Size D (mm)	Ø 130
Size E (mm)	Ø
	200
Size F (mm)	180
Size G (mm)	756

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61052

**NORDIK DECOR 1S 90/36 B.
S.GR.COM. P/L**



Ceiling fans

DESCRIPTION

- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant PP, colour white.
- Nominal diameter of blades 900 mm
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings.
- Maximum air flow 8,520 m³/h
- 4 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white, connected to the hub by reinforced brass coloured mounts.
- Steel ceiling rod, polyester powder coated in the same colour as the blades, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept Light Kit (optional), suitable for lamp rated 150W max with E27 screw fitting, or equivalent energy-saving lamp with E27 screw fitting.
- Globe lampshade of laminated glass, colour opaline.
- IMQ safety and performance certifications
- Speed selectable by way of control units or Telenordik 5T remote control (optional).

ACCESSORIES



TELENORDIK 5T
Code 22387



**KIT SCB5
(TRASF.5 V.)**
Code 22483



**DECOR LIGHT
KIT (KIT LUCE)**
Code 22416



**SCNRL5 UNIF. X
NK SOFFITTO**
Code 12957

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com