

Technical Data Sheet

CODE 61065

NORDIK ECO 200/80"

Energy saving and reversible ceiling fans




IMQ



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,37	Weight (Kg)	10
Absorbed Power max (W)	40	! "ŠŃŮč ; "ææf ß- íßá ; "ææf aní'q'ç	1,38
Blades diameter	2000	Delivery max (m ³ /h)	22500
Frequency (Hz)	50	Delivery max (m ³ /min)	375,00
Insulation Class	I°	RPM	200
Max ambient temperature for continuous operation (°C)	45	Service value (m ³ /min)/W	9,375
Voltage (V)	220-240	Sound power level Lw [dB(A)]	57,8

DIMENSIONS

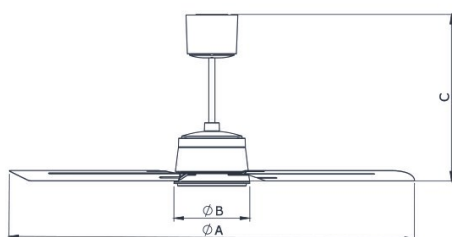

Size A (mm)	Ø
Size B (mm)	Ø 237
Size C (mm)	535

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61065

NORDIK ECO 200/80"

Energy saving and reversible ceiling fans



DESCRIPTION

- Nominal diameter of blades 2000 mm.
- Cups and motor covers molded in heat-resistant polymer (ASA), matt white (RAL9016).
- EC (brushless) motor with shaft turning in ball bearings, reversible function, able to grant high performance throughout the operating range. Integrated motor driver.
- 3 powder coated sheet steel blades, matt white (RAL9016).
- Powder coated steel ceiling rod, matt white (RAL9016).
- Rubber anti-vibration washer.
- Possibility of speed regulation by potentiometer or IR remote control (optional).

ACCESSORIES



NKE ROD 160

Code 21150



NKE ROD 290

Code 21151



NKE ROD 665

Code 21154



NKE ROD 915

Code 21155

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com