

# Technical Data Sheet

CODE 61260


NORDIK 1S 120/48 SENZA  
GR.COM.



Ceiling fans with or without light




## Certifications



## TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,33	Airflow speed at max speed (m/s)	2,02
Absorbed Power max (W)	70	Delivery max (m <sup>3</sup> /h)	11820
Blades diameter	120	Delivery max (m <sup>3</sup> /min)	197,00
Frequency (Hz)	50	giri_minuto	205
Insulation Class	I°	RPM	205
Voltage (V)	220-240	Service value (m <sup>3</sup> /min)/W	2,814
Weight (Kg)	5,5	Sound power level Lw [dB(A)]	49,1

## DIMENSIONS

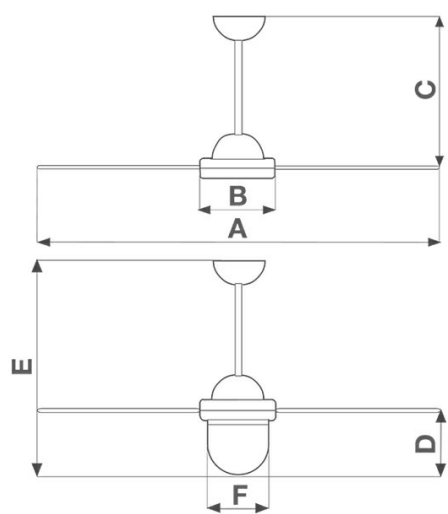

Size A (mm)	∅
	1218
Size B (mm)	∅ 230
Size C (mm)	495

con DECOR LIGHT KIT

### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 61260

**NORDIK 1S 120/48 SENZA  
GR.COM.**



Ceiling fans with or without light

## DESCRIPTION

- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant PP, colour white.
- Nominal diameter of blades 1200 mm.
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings.
- Maximum air flow: 11,820 m<sup>3</sup>/h.
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white
- Steel ceiling rod with polyester powder coated finish, colour white, length 375 mm
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Speed selectable by way of control units or Telenordik 5T remote control (optional)

## ACCESSORIES



**SCNR5 UNIF.X  
NK SOFFITTO**

Code 12955



**KIT SCB5  
(TRASF.5 V.)**

Code 22483



**KIT SCB  
(TRASF.E.C.)**

Code 22481



**TELENORDIK 5T**

Code 22387

### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)