

Technical Data Sheet

CODE 61401


NORDIK 1S/L 160/60 SENZA GR.COM.



Ceiling fans with or without light




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,740	Airflow speed at max speed (m/s)	1,34
Absorbed Power max (W)	175	Delivery max (m ³ /h)	14000
Blades diameter	160	Delivery max (m ³ /min)	233,33
Frequency (Hz)	50	giri_minuto	215
Insulation Class	I°	RPM	215
Voltage (V)	220-240	Service value (m ³ /min)/W	1,061
Weight (Kg)	7,7	Sound power level Lw [dB(A)]	55,5

DIMENSIONS

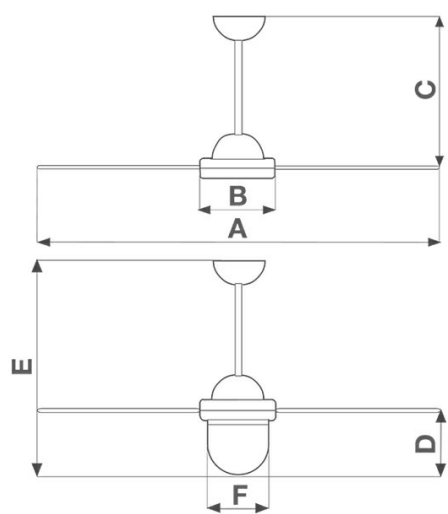

Size A (mm)	∅
	1524
Size B (mm)	∅ 230
Size C (mm)	495
Size D (mm)	190
Size E (mm)	685
Size F (mm)	∅
	208

con DECOR LIGHT KIT

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61401

NORDIK 1S/L 160/60 SENZA GR.COM.



Ceiling fans with or without light

DESCRIPTION

- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant PP, colour white.
- Nominal diameter of blades 1600 mm.
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings.
- Maximum air flow 14,000 m³/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white
- Steel ceiling rod with polyester powder coated finish, colour white, length 375 mm
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Globe lampshade of laminated glass, colour opaline; E27 screw holder for lamp rated 150W max, or equivalent energy saving lamp with E27 fitting, mandatory in EU.
- Speed selectable by way of control units with on/off light switch or Telenordik 5T remote control (optional)

ACCESSORIES



TELENORDIK 5T
Code 22387



KIT SCB5
(TRASF.5 V.)
Code 22483



SCNRL5 UNIF. X
NK SOFFITTO
Code 12957



C 2.5
(COMANDO EL.
2.5 A)
Code 12967

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com