

# Technical Data Sheet

CODE 61460


## NORDIK 1S 160/60 SENZA G.C.



Ceiling fans with or without light




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,34	Airflow speed at max speed (m/s)	1,34
Absorbed Power max (W)	70	Delivery max (m <sup>3</sup> /h)	14000
Blades diameter	160	Delivery max (m <sup>3</sup> /min)	233,33
Frequency (Hz)	50	giri_minuto	215
Insulation Class	I°	RPM	215
Voltage (V)	220-240	Service value (m <sup>3</sup> /min)/W	3,333
Weight (Kg)	6,6	Sound power level Lw [dB(A)]	55,5

### DIMENSIONS

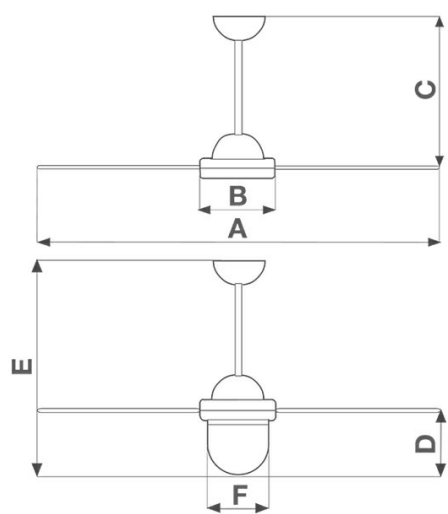

Size A (mm)	∅
	1524
Size B (mm)	∅ 230
Size C (mm)	495

con DECOR LIGHT KIT

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 61460

## NORDIK 1S 160/60 SENZA G.C.



Ceiling fans with or without light

### DESCRIPTION

- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant PP, colour white.
- Nominal diameter of blades 1600 mm.
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings.
- Maximum air flow: 14,000 m<sup>3</sup>/h.
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white
- Steel ceiling rod with polyester powder coated finish, colour white, length 375 mm
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Speed selectable by way of control units or Telenordik 5T remote control (optional)

### ACCESSORIES



←  
**SCNR5 UNIF.X  
NK SOFFITTO**

Code 12955

**ASTA NK 275  
BIANCA**

Code 22034

**ASTA NK 350  
BIANCA**

Code 22040

**ASTA NK 200  
BIANCA**

Code 22030



#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)