

Technical Data Sheet


CODE 61753

NORDIK EVOLUTION R 160/60" BIANCO

Reversible ceiling fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Delivery max (m ³ /h)	17011
Insulation Class	I°	Delivery max (m ³ /min)	283,52
Voltage (V)	220-240	RPM	193
Airflow speed at max speed (m/s)	1,63	Service value (m ³ /min)/W	4,050
		Sound power level Lw [dB(A)]	55,6

DIMENSIONS

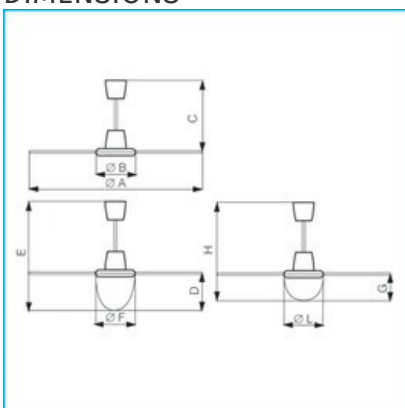

Size A (mm)	980
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61753

NORDIK EVOLUTION R 160/60" BIANCO



Reversible ceiling fans

DESCRIPTION

- Nominal diameter of blades 1600 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white.
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant thermoplastic resin (PP).
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
- Maximum air flow 17011 m³/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white.
- Steel ceiling rod with scratch-resistant polyester powder coated finish, colour white, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept 2 specific optional light kits:
 - with lamp rated 105 W max, E27 screw fitting
 - with 2x15 W max energy saving lamp, E27 screw fitting (mandatory in EU).
- Speed selectable by way of control units or Telenordik 5TR remote control (optional)

ACCESSORIES



EVOLUTION
LIGHT KIT
Code 22413



EVOLUTION
LIGHT KIT ES
Code 22414



SCRR5
Code 12963



SCRR/M
Code 12965

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com