

# Technical Data Sheet


CODE 70919

## VORTDRY 1000 JET

Hair dryers with flexible hose




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	3,5	Shock resistance rating (IK)	09
Absorbed Power max (W)	800	Voltage (V)	230
Frequency (Hz)	50	Weight (Kg)	3,2
Insulation Class	II°	Delivery max (l/s)	52,7
IP	X4	Delivery max (m <sup>3</sup> /h)	190
Motor Power (W)	90	Power in stand-by mode (W)	0,5110
		Sound pressure level Lp [dB (A)] 1m	62

### DIMENSIONS

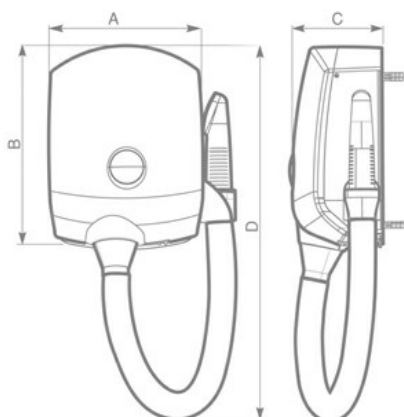

Size A (mm)	320
Size B (mm)	380
Size C (mm)	160
Size D (mm)	560

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 70919

## VORTDRY 1000 JET

Hair dryers with flexible hose



### DESCRIPTION

- Front cover made of self-extinguishing plastic rated V0, colour white with chrome inserts.
- Motor mounting flange moulded in self-extinguishing polypropylene (PP) rated V0.
- PVC spiral hose of length from 500 mm to 1600 mm; nozzle and handgrip moulded in ABS plastic.
- AC motor with thermal overload cutout and shaft turning in ball bearings, coupled to a centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Appliance incorporating automatic shutdown function: the dryer switches off when the nozzle is replaced, or alternatively, after around 20 minutes of operation uninterrupted.
- Air flow 190 m<sup>3</sup>/h.
- Washable dust filter.
- IMQ safety certification.

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)