

Technical Data Sheet

CODE 70921

VORTDRY 1000 PLUS

Hair dryers with flexible hose



Certifications



IMQ



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	4,7	Shock resistance rating (IK)	06
Absorbed Power max (W)	1000	Voltage (V)	230
Frequency (Hz)	50	Weight (Kg)	1,9
Insulation Class	II°	Delivery max (l/s)	31,6
IP	X4	Delivery max (m ³ /h)	114
Motor Power (W)	120	Power in stand-by mode (W)	0,5050
		Sound pressure level Lp [dB (A)] 1m	68

DIMENSIONS

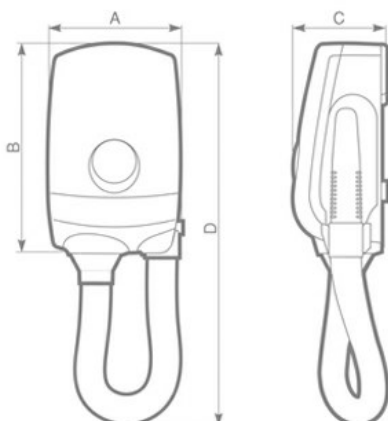

Size A (mm)	190
Size B (mm)	300
Size C (mm)	130
Size D (mm)	550

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 70921

VORTDRY 1000 PLUS

Hair dryers with flexible hose



DESCRIPTION

- Front cover made of self-extinguishing plastic rated V0, colour white.
- Motor mounting flange moulded in self-extinguishing polypropylene (PP) rated V0.
- PVC spiral hose of length from 500 mm to 1600 mm; nozzle and handgrip moulded in ABS plastic.
- Commutator motor with thermal overload protection.
- Heating elements protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Equipped with razor sockets for 230 V / 50 Hz and 110 V / 60 Hz power, with overload protection.
- Appliance incorporating automatic shutdown function: the dryer switches off when the nozzle is replaced, or alternatively, after around 20 minutes of operation uninterrupted.
- Air flow 114 m³/h.
- Washable dust filter.
- IMQ safety certification.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com