


## ARIANTE® RANGE

Suitable for domestic and commercial applications due to its unique spiral airflow.

- Casing moulded from plastic resin able to withstand aging induced by exposure to sunlight (UV-resistant), and formulated with an antistatic compound to prevent accumulation of dust.
- Component parts are made in 5 pastel colours (pale yellow, grey, pink, sky blue, light green). Parts are assembled entirely at random, so that the mix of colours will always be different and the visual effect always pleasing and harmonious. There are no less than 78,125 possible combinations. In practice, every Ariante® 30 Arlecchino is different from all others of the series: a unique example of industrial art.
- Nominal diameter: 300 mm
- Protective grilles made of ABS impact- and UV-resistant thermoplastic resin: front grille rotatable, rear grille fixed.
- Fan rotor moulded from ABS thermoplastic resin.
- 3 speed asynchronous motor with shaft turning in self-aligning and self-lubricating bushings; thermal overload protection.
- Air flow 1300 m³/h
- Front grille rotation mechanism incorporating synchronous motor with rubber gear housed in the front part of the casing.
- Provided with two rotary switches: The first switch, which has 4 positions (OFF-1-2-3), is used to turn the fan on and off and select the three speeds of the rotor; the second switch, which has 2 positions (ON and OFF), is used to control the rotation of the front grille by turning the synchronous drive motor on or off.
- PVC power cord, length 1.80 m, with 10A moulded plug conforming to the requirements of the EU Machinery Directive.
- IM Q safety and performance certifications
- Recipient of the Compasso D'oro award for product design
- Insulation class: Cl.II

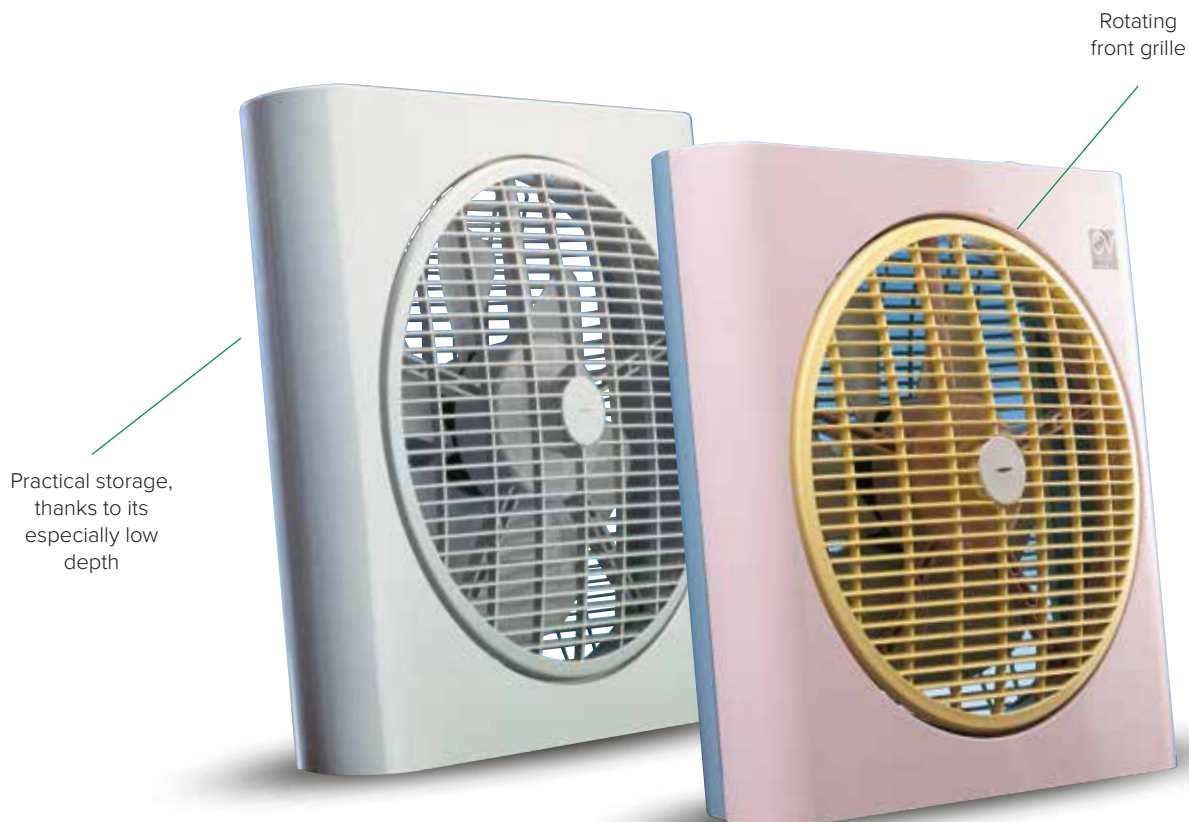

Practical storage,  
thanks to its  
especially low  
depth



Control unit made up  
of two rotary switches:  
The first switch has 4 positions,  
controls switch-on and switch-off  
and allows for the selection of 3  
speeds. The second switch  
has 2 positions and controls  
front grille rotation.

The power cable can be  
wound and retracted into the  
corresponding niche at the  
bottom of the unit



Easy removable front  
grille for simple cleaning  
and maintenance



## ARIANTE RANGE

### ROTATING, MULTI-DIRECTIONAL TABLE AND FLOOR FANS

## TECHNICAL DATA


MODELS	CODE	COLOR	V 50/60HZ	W	A	RPM	NR. BLADE	MAX AIRFLOW m³/h	Kg
ARIANTE 30	60790	GREY	220 - 240	35	0,17	1075	6	1306	3.5
ARIANTE 30 ARLECCHINO	60795	MULTI COLOR							

## ARIANTE® RANGE | TECHNICAL DATA FOR REGULATION N° 206/2012 UE

	SYMBOL	UNIT OF MEASURE	ARIANTE 30	ARIANTE 30 ARLECCHINO
CODE			60790	60790
Maximun fan air flow	F	m³/min	21,77	21,77
Fanpower input	P	W	35	35
Service value	SV	(m³/min)W	0,622	0,622
Standby power consumption	PSB	kW	0.9950	0.9950
Fan sound power level	LWA	dB(A)	54,5	54,5
Maximum air velocity	C	m/sec	2,03	2,03
Measurement standard for service value			IEC 60879; EN62301: UNI EN ISO 3741	

For more information refer to: Vortice Elettrosociali Spa, Strada Cerca, 2 - 20067 Zoate di Tribiano (MI) Italia

## DIMENSIONS

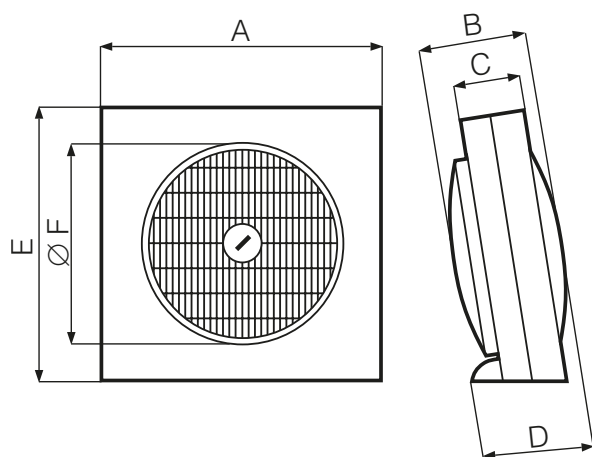

MODELS	A	B	C	D	E	ØF
ARIANTE 30	440	162	90	175	440	335
ARIANTE 30 ARLECCHINO						
Dimensions (mm)						